

# FOR INDOORS, OUTDOORS, TOP AND BOTTOM ...

THE PRODUCT OVERVIEW FROM JORDAN LACKE 2022/2023



SHOW WHAT YOU ARE ABLE TO DO!  
[WWW.JORDANLACKE.DE](http://WWW.JORDANLACKE.DE)

JORDAN Lacke is a brand of PLANTAG Coatings GmbH. Based on the strong alliance of this group, we have a very good network of subsidiaries and distributors as well as our own innovative laboratories. We ensure short ways to our customers on the one hand, but also a broad expertise and innovative surface solutions using the most modern raw materials.

Based on this, we have been developing high-quality products for over 125 years. In all those years, we have established a firm place for ourselves with joineries and are proud of a variety of satisfied and long-standing PCG partners.

After all, you are at the centre of everything we do. For carpenters, there are a multitude of application areas and uses for our products in everyday life. And so our new application-oriented product overview is designed to help you in practice to quickly find the perfect surface solution.

Discover on the next pages what has impressed our customers and partners for over 125 years. Find new trends and show what you can do with the JORDAN Lacke product world.



## DISCOVER JORDAN LACKE AND OUR WIDE RANGE OF PRODUCTS FOR ALL APPLICATIONS

Quick overview from page 74!

### FOR FURNITURE

8 – 27

For furniture of all kinds, we offer the right products for your individual surfaces, from clear and coloured lacquers to metallic shades, stains and oils.

### FOR KITCHENS & BATHROOMS

28 – 37

Kitchen and bathroom furniture surfaces have special requirements. Select from our product portfolio lacquers, oils and stains for the creation of high-quality surfaces.

### FOR PARQUET & STAIRS

38 – 45

To protect parquet floors and stairs, we offer a wide range of products for heavily used surfaces. Dirt-, scratch- and abrasion-resistant - for the highest demands.

### FOR DOORS

46 – 53

Water-based lacquers and oils for interior doors, door panels and frames. Our portfolio offers opaque, glazing and clear lacquers as well as oiled surfaces.

### FOR INTERIOR FITTINGS

54 – 63

For a healthy indoor climate - with our decopaint-compliant lacquers, oils and stains for coating wooden ceilings, wall panelling, etc. Choose from a wide range of products.

### FOR OUTDOOR USE

64 – 67

Our biocide- and pesticide-free wood preservative for exterior use not only protects wood surfaces, but also the environment: effective against animal and plant pests.

### FOR CARE & CLEANING

68 – 71

Whether by hand or machine: with our cleaning and care products, you can maintain surfaces and ensure a long-lasting value preservation of furniture and floors.

### ADDITIONAL PRODUCTS

72 – 73

Our wide range of additional products offers further possibilities for surface coating with effect pastes, colour concentrates and additives.

FURNITURE

KITCHEN & BATH

PARQUET & STAIRS

DOORS

INTERIOR FITTINGS

OUTDOOR

CARE & CLEANING

ADDITIONAL PRODUCTS



# COMPETENCE IN LACQUER LOCALLY PRESENT

JORDAN LACKE - YOUR EXPERT  
IN TERMS OF COATINGS

**1** COMPETENCE IN LACQUER FOR  
ROBUST SURFACES AND HIGHEST RESISTANCE.  
THE PERFECT PROTECTION

**2** COMPETENCE IN LACQUER FOR  
FINE AND HIGH-QUALITY SURFACES.  
THE PERFECT FINISH

**3** COMPETENCE IN LACQUER FOR  
A VARIETY OF DESIGN POSSIBILITIES.  
THE PERFECT DESIGN

**4** COMPETENCE IN LACQUER FOR  
FUNCTIONAL SURFACES.  
THE PERFECT FUNCTION

**5** COMPETENCE FOR THE ENVIRONMENT  
CONSCIOUS ACTION  
BEYOND THE SURFACE

Because it is important what you put on top:  
The PCG helmet is the sign of highest quality regarding  
surfaces. Protection, finish, design, and function - our  
helmet serves as a symbol for all these features.

In our company you will always find your direct  
contact person, be it inhouse or among our field staff.  
We offer commercial and technical customer service.  
Our international experts support you worldwide.

Discover our customer service at [jordanlacke.de/en/](http://jordanlacke.de/en/)  
and quickly find assistance in your vicinity.

## OUR FIELD STAFF IS:

- + always quickly available locally
- + working for you at all times
- + competent and friendly
- + always professionally up to date



## A STRONG GROUP WORLDWIDE CONCENTRATED COMPETENCE FOR A VERSATILE PRODUCT PORTFOLIO

### OUR INTERNATIONAL SUBSIDIARIES:

- **BENELUX** PLANTAG COATINGS GROEP B.V.
- **BRASIL** PLANTAG DO BRASIL Ltda
- **INDIA** PLANTAG COATINGS INDIA Pvt. Ltd.
- **POLAND** PLANTAG Sp. z.o.o.
- **ROMANIA** PLANTAG ROMANIA S.R.L.
- **SWITZERLAND** PLANTAG SCHWEIZ GMBH
- **TURKEY** PLANTAG ENDÜSTRIYEL BOYA  
VERNIK SANAYI VE TIC. LTD. ŞTI

### OUR ADVANTAGES AT A GLANCE:

- + MODERN COATING SYSTEMS
- + GOOD PRICE-PERFORMANCE RATIO
- + CERTIFIED QUALITY
- + CONSULTING AND TECHNICAL SUPPORT LOCALLY
- + DEVELOPMENT IN COOPERATION WITH THE CUSTOMER
- + SYSTEM SUPPLIER WITH OWN LABORATORIES
- + FAST DELIVERIES WORLDWIDE



EXCLUSIVE HIGH-END HEADPHONES



KINDERGARTEN IN FRAUENFELD



COUNCIL CHAMBER OF THE ECB IN FRANKFURT

„THE WHITE SKIN“, ELBPHILHARMONIE HAMBURG



PARQUET FLOORING IN THE OMEGA MUSEUM IN BIEL



## JORDAN LACKE IN ACTION

OUR REFERENCES



RESTAURANT MUS BAR & VIEW IN POSEN




LOG HOUSE IN THE DISTRICT OF GÜNZBURG



PIZZERIA FORNI ROSSI IN POSEN



For furniture of all kinds, we offer the right products for your individual surfaces, from clear and coloured lacquers to metallic shades, stains and oils.




**CHANGES START SMALL**

Did you know that we deployed our first all-electric company vehicle back in 2012?  
**PCG – Beyond the surface**



# SURFACES WITH STYLE

## LACQUERS AND OILS FOR FURNITURE



**8-27**

1C+2C AQUA-FILLER AF 430  
1C+2C AQUA MAGIC-COLOR AMC 462  
2C AQUA-NATUREFFEKT AN 420  
1C+2C AQUA-CLEAR AC 475  
1C+2C AQUA-CLEAR LOW AC 477  
1C+2C AQUASTEP AS 490

2C PUR-FILLER F 1338  
2C ACRYPUR-BASE COAT H 23100  
2C JOCOPHEN-BASE COAT H 2010  
2C HIGH-SOLID-BASE COAT H 4500  
1C CLASSICBASE CBM 820  
1C CLASSICBASE CB 823  
2C JORA-BRILLANT-COLOR JBC 855  
2C HIGH-SOLID-COLOR H 600X  
2C JORA-COLOR JC 150  
2C COLORLUX-METALLIC H 378  
1C TEMPOFIX-SCHICHTER SG 17-X  
1C COSMOLIT-SCHICHTER HS 200X  
2C PUR-SCHICHTER H 136X  
2C HIGH-SOLID-SCHICHTER H 400X  
2C JOCOPHEN-DD-LACQUER H 224X  
2C CLASSIC-EXTREME-RESIST CE 894-X  
2C GIESS-COLORLUX H 37X  
2C JORA ULTRA-MATT RESIST JF2492-0000  
2C JORA-BRILLANT JB 875  
2C JOCOPAN-ROHHOLZEFFEKTLACK H 1861

1C DECO-OIL-COLOR DO 630  
1C DECO-OIL DO 640C  
1C+2C DECO-OIL DO 660  
1C DECO-OBJECT-OIL DO 670  
1C DECO-NATURWACHS-OIL DO 680  
1C ECO-HARTWACHS-FINISH EHF 570

HYDROSTAIN MODULAR JC63X0  
AQUASTAIN-COLOR ASC 531-533  
CLASSICSTAIN CS 731-833



## 1C+2C AQUA-FILLER AF 430

**Water-based 1+2-component universal filler with excellent filling power and good sandability**

AQUA-FILLER AF 430 (white)  
AQUA-FILLER AF 430-S (black)

**MIXING RATIO**  
10:1 by volume with AQUAHARDENER AH 412

**DELIVERY BATCHES**  
7 and 25 kg

**ADDITIONALS**  
Thinner: Water  
Cleaning: Water | AC 460


### PRODUCT PROPERTIES

- + overcoatable with all our colour lacquer systems from JORDAN Lacke
- + excellently sandable
- + excellent filling power
- + perfect adhesion
- + excellent firmness on vertical surfaces

### STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 4102-B1 low flammability (in combination with AQUA-MAGIC-COLOR AMC 462) (under examination)
- + decopaint-compliant

### SCOPE OF APPLICATION



### TYPE OF APPLICATION



## 1C+2C AQUA MAGIC-COLOR AMC 462

**Water-based 1+2 component coloured lacquer harmonising quality demand and environmental awareness**

**GLOSS LEVEL**  
matt

**MIXING RATIO**  
10:1 by volume with AQUAHARDENER AH 412

**DELIVERY BATCHES**  
3, 10 und 25 kg

Colour shades available in RAL, Sikkens, NCS, etc

**ADDITIONALS**  
Thinner: Water  
Cleaning: Water | AC 460


### PRODUCT PROPERTIES

- + very high light stability
- + very high opacity
- + very good sanding marks coverage
- + high abrasion and scratch resistance
- + excellent levelling properties
- + easy to use

### STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 4102-B1 low flammability (under examination)
- + DIN 53160 resistance to saliva and perspiration (under examination)
- + EN ISO 2409-GT 0 adhesive strength
- + decopaint-compliant

### SCOPE OF APPLICATION



### TYPE OF APPLICATION



## 2C AQUA-NATUREFFEKT AN 420

**Water-based 2 component natural effect lacquer with high resistance**

**GLOSS LEVEL**  
natural matt

**MIXING RATIO**  
10:1 by volume with AQUAHARDENER AH 410

**DELIVERY BATCHES**  
5 and 25 kg

**ADDITIONALS**  
Thinner: Water  
Cleaning: Water | AC 460


### PRODUCT PROPERTIES

- + high mechanical resistance
- + very good chemical resistance
- + dries to a raw wood-like natural matt finish
- + pleasant touch

### STANDARDS AND TESTS

- + following DIN 68861-1B chemical resistance
- + DIN 53160 resistance to saliva and perspiration
- + EN 71, part 3, free of extractable heavy metals
- + EN ISO 2409-GT 0 adhesive strength
- + decopaint-compliant

### SCOPE OF APPLICATION



### TYPE OF APPLICATION



## 1C+2C AQUA-CLEAR AC 475

**Water-based 1+2 component clear lacquer with high scratch and abrasion resistance**

**GLOSS LEVEL**  
- 10 (deep matt)  
- 20 (matt)  
- 30 (semi-matt)

**MIXING RATIO**  
10:1 by volume with AQUAHARDENER AH 412

**DELIVERY BATCHES**  
10 and 25 kg

**ADDITIONALS**  
Thinner: Water  
Cleaning: Water | AC 460


### PRODUCT PROPERTIES

- + very high light stability
- + excellent transparency
- + high abrasion and scratch resistance
- + very good accentuation of the grain
- + easy to use


### STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 4102-B1 low flammability (under examination)
- + DIN 53160 resistance to saliva and perspiration (under examination)
- + EN ISO 2409-GT 0 adhesive strength
- + decopaint-compliant

### SCOPE OF APPLICATION



### TYPE OF APPLICATION





## 1C+2C AQUA-CLEAR LOW AC 477

**Water-based 1+2 component clear lacquer for coating off porous woods**

**GLOSS LEVEL**  
 - 10 (deep matt)  
 - 20 (matt)  
 - 30 (semi-matt)

**MIXING RATIO**  
 10:1 by volume with AQUAHARDENER AH 412

**DELIVERY BATCHES**  
 10 and 25 kg

**ADDITIONALS**  
 Thinner: Water  
 Cleaning: Water | AC 460


**PRODUCT PROPERTIES**

- + solids-reduced variant of AC 475
- + especially suitable for porous woods
- + very high light stability
- + particularly high transparency
- + very good accentuation of the grain
- + easy to use

**STANDARDS AND TESTS**

- + EN 71, part 3, free of extractable heavy metals
- + DIN 4102-B1 low flammability (under examination)
- + EN ISO 2409-GT 0 adhesive strength
- + DIN 53160 resistance to saliva and perspiration (under examination)
- + decopaint-compliant

**SCOPE OF APPLICATION**



**TYPE OF APPLICATION**



## 1C+2C AQUASTEP AS 490

**Water-based 1+2 component stair lacquer with good light stability**

**GLOSS LEVEL**  
 matt (-5)  
 semi-matt (-3)

**MIXING RATIO**  
 10:1 by volume with AQUAHARDENER AH 410

**DELIVERY BATCHES**  
 10 and 25 kg

**ADDITIONALS**  
 Thinner: Water  
 Cleaning: Water | AC 460


**PRODUCT PROPERTIES**

- + excellent light stability
- + good accentuation of the grain
- + easy handling
- + standing and suspended parts can be coated without problems
- + even levelling and high abrasion resistance

**STANDARDS AND TESTS**

- + EN 71, part 3, free of extractable heavy metals
- + following DIN 68861-1B chemical resistance
- + EN ISO 2409-GT 0 adhesive strength
- + slip resistance class R10 in combination with AQUA PRO-GRIP APG 402
- + resistance to cream
- + decopaint-compliant

**SCOPE OF APPLICATION**



**TYPE OF APPLICATION**



## 2C PUR-FILLER F 1338

**Solvent-based, 2-component universal filler**

PUR-FILLER F 1338 (white)  
 PUR-FILLER F 1338-S (black)

**MIXING RATIO**  
 10:1 by volume with hardener H 132

**DELIVERY BATCHES**  
 5, 15 and 25 kg

**ADDITIONALS**  
 Thinner: V 2244 | V 1313  
 Retarder: V 19  
 Cleaning: V 1415 | V 2244 | V 803


**PRODUCT PROPERTIES**

- + fast drying
- + very good machine sandability
- + good manual sandability
- + very good adhesion
- + good firmness on vertical surfaces


**STANDARDS AND TESTS**

- + EN 71, part 3, free of extractable heavy metals
- + DIN 4102-B1 low flammability (in combination with JORA-COLOR JC 150 and GIESS-COLORLUX H 37X)
- + EN ISO 2409-GT 0 adhesive strength

**SCOPE OF APPLICATION**



**TYPE OF APPLICATION**



## 2C ACRYPUR-BASE COAT H 23100

**Solvent-based, transparent 2-component primer on a polyurethane base**

**MIXING RATIO**  
 10:1 by volume with hardener H 132

**DELIVERY BATCHES**  
 10 litre

**ADDITIONALS**  
 Thinner: V 2244  
 Retarder: V 19  
 Cleaning: V 1415 | V 2244 | V 803

**PRODUCT PROPERTIES**

- + easy handling
- + very good filling power
- + excellent sanding


**STANDARDS AND TESTS**

- + EN 71, part 3, free of extractable heavy metals
- + free of formaldehyde

**SCOPE OF APPLICATION**



**TYPE OF APPLICATION**







## 2C JOCOPHEN-BASE COAT H 2010

**Solvent-based, transparent 2-component primer as well as a sealing primer for ingredient-rich woods**

**MIXING RATIO**  
2:1 by volume with hardener H 2242

**DELIVERY BATCHES**  
5 litre

**ADDITIONALS**  
Thinner: V 2244  
Retarder: V 19  
Cleaning: V 1415 | V 2244 | V 803

### PRODUCT PROPERTIES

- + easy to use
- + fast drying
- + excellent sandability when dry
- + good sealing properties regarding wood ingredients (very suitable for exotic woods)

### STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + free of formaldehyde

### SCOPE OF APPLICATION



### TYPE OF APPLICATION



## 2C HIGH-SOLID-BASE COAT H 4500

**Solvent-based 2-component polyurethane system with high solids content**

**MIXING RATIO**  
2:1 by volume with hardener H 4002

**DELIVERY BATCHES**  
5 and 25 litre

**ADDITIONALS**  
Thinner: V 2244  
Retarder: V 19  
Cleaning: V 2244 | V 803

### PRODUCT PROPERTIES

- + high filling power
- + very good sanding
- + ensures solvent, cost and time savings
- + used as base coat for buffable high gloss coatings
- + very good accentuation of the grain

### STANDARDS AND TESTS

- + DIN 4102-B1 low flammability (in combination with JORA-BRILLANT JB 875)

### SCOPE OF APPLICATION



### TYPE OF APPLICATION



## 1C CLASSICBASE CBM 820

**Solvent-based adhesive primer for metal**

CLASSICBASE CBM 820 (transparent)  
CLASSICBASE CBM 820-G (grey)


**DELIVERY BATCHES**  
0,9 and 4,5 kg

**ADDITIONALS**  
Thinner: V 2244  
Cleaning: V 1415 | V 2244

### PRODUCT PROPERTIES

- + excellent adhesion properties on most metal substrates (such as iron, steel, aluminium, copper, etc.)

### SCOPE OF APPLICATION



### TYPE OF APPLICATION



## 1C CLASSICBASE CB 823

**Solvent-based adhesive primer for glass**


**DELIVERY BATCHES**  
1 litre

**ADDITIONALS**  
Cleaning: V 1415 | V 2244 | V 803

### PRODUCT PROPERTIES

- + high mechanical bonding with the glass surface
- + low application quantity ensures economical use

### SCOPE OF APPLICATION



### TYPE OF APPLICATION







## 2C JORA-BRILLANT-COLOR JBC 855

**Solvent-based 2-component high-gloss lacquer with brilliant colours**

**GLOSS LEVEL**  
high gloss

**MIXING RATIO**  
2:1 by volume with hardener H 872  
or 2:1 by volume with hardener H 874  
(for fast drying)

**DELIVERY BATCHES**  
1, 5 and 25 kg

Colour shades available in RAL, Sikkens, NCS, etc.

**ADDITIONALS**  
Thinner: V 2083  
Cleaning: V 2244 | V 803 | V 2083

**PRODUCT PROPERTIES**

- + coloured, brilliant high-gloss coating
- + excellent chemical and mechanical resistance
- + can be buffed and polished after overnight drying

**STANDARDS AND TESTS**

- + EN 71, part 3, free of extractable heavy metals
- + DIN 4102-B1 low flammability
- + DIN 68861-1B chemical resistance
- + DIN 53160 resistance to saliva and perspiration
- + EN ISO 2409-GT 0 adhesive strength
- + free of formaldehyde

**SCOPE OF APPLICATION**



**TYPE OF APPLICATION**



## 2C HIGH-SOLID-COLOR H 600X

**Solvent-based 2-component coloured lacquer system with high filling power**

**GLOSS LEVELS**  
H 6000 matt  
H 6007 special matt

**MIXING RATIO**  
2:1 by volume with hardener H 6002

**DELIVERY BATCHES**  
1, 3, 10 and 25 kg

Colour shades available in RAL, Sikkens, NCS, etc.

**ADDITIONALS**  
Thinner: V 2244  
Retarder: V 19  
Cleaning: V 2244 | V 803

**PRODUCT PROPERTIES**

- + ensures solvent, cost and time savings
- + metal marking resistant
- + solvent-resistant
- + high scratch and abrasion resistance
- + extremely fast drying
- + very high solids content

**STANDARDS AND TESTS**

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1B chemical resistance
- + DIN 53160 resistance to saliva and perspiration
- + PVC resistant

**SCOPE OF APPLICATION**



**TYPE OF APPLICATION**



## 2C JORA-COLOR JC 150

**Solvent-based, matt 2-component PUR acrylate coloured lacquer free of aromatic substances**

**GLOSS LEVEL**  
matt

**MIXING RATIO**  
10:1 by volume with hardener H 132

**DELIVERY BATCHES**  
1, 3, 10 and 25 kg

Colour shades available in RAL, Sikkens, NCS, metallic shades, etc.

**ADDITIONALS**  
Thinner: V 2244  
Retarder: V 19  
Cleaning: V 1415 | V 2244 | V 803

**PRODUCT PROPERTIES**

- + good sanding marks coverage
- + easy handling
- + lightfast
- + free of aromatic substances
- + excellent levelling properties
- + very good adhesion on difficult surfaces
- + good chemical and mechanical resistance
- + suitable for children's toys

**STANDARDS AND TESTS**

- + EN 71, part 3, free of extractable heavy metals
- + DIN 4102-B1 low flammability  
(in combination with PUR-FILLER F 1338 and hardener H 132)
- + DIN 68861-1B chemical resistance
- + DIN 53160 resistance to saliva and perspiration
- + PVC resistant

**SCOPE OF APPLICATION**



**TYPE OF APPLICATION**



## 2C COLORLUX-METALLIC H 378

**Solvent-based 2-component lacquer with a decorative metal effect**

**MIXING RATIO**  
10:1 by volume with hardener H 132

**DELIVERY BATCHES**  
1, 3, 10 and 25 kg

Colour shades available as special adjustments

**ADDITIONALS**  
Thinner: V 2244  
Retarder: V 19  
Cleaning: V 1415 | V 2244 | V 803


**PRODUCT PROPERTIES**

- + lightfast
- + metal marking resistant
- + easy handling
- + excellent opacity


**STANDARDS AND TESTS**

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1B chemical resistance
- + DIN 53160 resistance to saliva and perspiration
- + PVC resistant

**SCOPE OF APPLICATION**



**TYPE OF APPLICATION**



Note: Metallic shades for furniture surfaces can be self-mixed with JORA-COLOR JC 150



## 1C TEMPOFIX-SCHICHTER SG 17-X

**Solvent-based 1-component NC multi-layer coating, usable as primer and top coat**

**GLOSS LEVEL**  
SG 17-3G semi-matt, SG 17-5G matt  
SG 17-6G deep matt

**DELIVERY BATCHES**  
5 and 30 litre

**ADDITIONALS**  
Thinner: V 1415  
Retarder: V 19  
Cleaning: V 1415 | V 803

### PRODUCT PROPERTIES

- + high filling capacity
- + fast drying
- + very good sandability
- + easy processing in spraying and curtain coating applications
- + beautiful surface with smooth touch


### STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 53160 resistance to saliva and perspiration

### SCOPE OF APPLICATION



### TYPE OF APPLICATION



## 1C COSMOLIT-SCHICHTER HS 200X

**Solvent-based, transparent one-can lacquer with integrated hardener, usable as primer and top coat**

**GLOSS LEVEL**  
HS 2003 semi-matt, HS 2005 matt  
HS 2006 deep matt

**DELIVERY BATCHES**  
25 litre

**ADDITIONALS**  
Thinner: V 1415  
Retarder: V 19  
Cleaning: V 1415 | V 803

### PRODUCT PROPERTIES

- + easy handling
- + fast processing
- + extremely durable surface quality


### STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1B chemical resistance
- + DIN 53160 resistance to saliva and perspiration
- + PVC resistant

### SCOPE OF APPLICATION



### TYPE OF APPLICATION



## 2C PUR-SCHICHTER H 136X

**Solvent-based 2-component clear lacquer on a polyurethane base, usable as primer and topcoat**

**GLOSS LEVEL**  
H 1363 semi-matt, H 1365 matt  
H 1366 deep matt, H 1367 special matt

**MIXING RATIO**  
10:1 by volume with hardener H 1362

**DELIVERY BATCHES**  
5 and 25 litre

**ADDITIONALS**  
Thinner: V 2244  
Retarder: V 19  
Cleaning: V 1415 | V 2244 | V 803


### PRODUCT PROPERTIES

- + suitable as primer and top coat
- + excellent levelling properties
- + very good filling power
- + easy handling
- + achieves a highly resistant, abrasion-proof surface

### STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1B chemical resistance
- + DIN 53160 resistance to saliva and perspiration
- + PVC resistant

### SCOPE OF APPLICATION



### TYPE OF APPLICATION



## 2C HIGH-SOLID-SCHICHTER H 400X

**Solvent-based 2-component clear lacquer on a polyurethane base, usable as primer and topcoat**

**GLOSS LEVEL**  
H 4001 glossy, H 4004 semi-matt  
H 4005 matt, H 4007 special matt

**MIXING RATIO**  
2:1 by volume with hardener H 4002

**DELIVERY BATCHES**  
10 litre

**ADDITIONALS**  
Thinner: V 2244  
Retarder: V 19  
Cleaning: V 2244 | V 803

### PRODUCT PROPERTIES

- + fast drying
- + excellent filling power
- + excellent sandability
- + creates a closed porous structure within one day
- + high-gloss finishes can be achieved with H 4001 (glossy)

### STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1B chemical resistance
- + DIN 53160 resistance to saliva and perspiration

### SCOPE OF APPLICATION



### TYPE OF APPLICATION





## 2C JOCOPHEN-DD-LACQUER H 224X



**Solvent-based 2-component clear lacquer / top coat with good filling power and fast drying**

**GLOSS LEVEL**  
H 2243 semi-matt, H 2245 matt  
H 2246 deep matt

**MIXING RATIO**  
2:1 by volume with hardener H 2242

**DELIVERY BATCHES**  
5 litre

**ADDITIONALS**  
Thinner: V 2244  
Retarder: V 19  
Cleaning: V 1415 | V 2244 | V 803

### PRODUCT PROPERTIES

- + recommended use in case of very high demands regarding hardness, resistance to water, alcohol and solvents
- + fast drying
- + good filling power

### STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1B chemical resistance
- + DIN 53160 resistance to saliva and perspiration
- + PVC resistant
- + free of formaldehyde

### SCOPE OF APPLICATION



### TYPE OF APPLICATION



## 2C GIESS-COLORLUX H 37X



**Solvent-based 2-component clear lacquer with excellent transparency and high light fastness**

**GLOSS LEVEL**  
H 371 glossy, H 373 semi-matt, H 375 matt,  
H 376 deep matt, H 376-S2 super matt,  
H 377 special matt

**MIXING RATIO**  
10:1 by volume with hardener H 132

**DELIVERY BATCHES**  
5 and 25 litre (H 371 only in 10 litre batches)

**ADDITIONALS**  
Thinner: V 2044  
Retarder: V 19  
Cleaning: V 1415 | V 2244 | V 803

### PRODUCT PROPERTIES

- + lightfast
- + for curtain coating and spraying
- + long pot life (2 - 3 days)
- + recommended for application as a top coat for JORA-COLOR JC 150


### STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 4102-B1 low flammability
- + DIN 68861-1B chemical resistance
- + DIN 53160 resistance to saliva and perspiration
- + PVC resistant

### SCOPE OF APPLICATION



### TYPE OF APPLICATION



## 2C CLASSIC-EXTREME-RESIST CE 894-X



**Solvent-based 2-component clear lacquer / top coat for interior workpieces exposed to high mechanical stresses**

**GLOSS LEVEL**  
CE 894-5 matt  
CE 894-6 deep matt

**MIXING RATIO**  
10:1 by volume with hardener H 132

**DELIVERY BATCHES**  
5 and 25 litre

**ADDITIONALS**  
Thinner: V 2244  
Retarder: V 19  
Cleaning: V 1415 | V 2244 | V 803

### PRODUCT PROPERTIES

- + anti-fingerprint
- + extremely high resistance to mechanical stress
- + suitable for coating surfaces primed with HIGH-SOLID-BASE COAT H 4500
- + suitable for coating surfaces primed with JOCOPHEN BASE COAT H 2010
- + suitable for coating surfaces that have been coated with JORA-COLOR JC 150
- + fast drying
- + easy handling

### STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1B chemical resistance
- + DIN 53160 resistance to saliva and perspiration
- + EN ISO 2409-GT 0 adhesive strength
- + PVC resistant

### SCOPE OF APPLICATION



### TYPE OF APPLICATION



## 2C JORA ULTRA-MATT RESIST JF2492-0000



**Solvent-based, ultra-matt 2 component top coat with very good gloss stability**

**GLOSS LEVEL**  
natural matt

**MIXING RATIO**  
100:15 by volume with hardener H 132 (JH2132-0000)

**DELIVERY BATCHES**  
5 and 25 litre

**ADDITIONALS**  
Cleaning: V 1415 | V 2244 | V 803


### PRODUCT PROPERTIES

- + ultra matt gloss level (similar to excimer technology)
- + excellent scratch resistance (anti-scratch)
- + anti-fingerprint
- + very pleasant touch
- + extremely good gloss stability
- + very high chemical resistance
- + suitable for coating surfaces primed with GIESS-COLORLUX H 376 and H 377
- + for light coloured surfaces

### STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + following DIN 68861-1B chemical resistance

### SCOPE OF APPLICATION



### TYPE OF APPLICATION



NEW!

NEW!

## 1C DECO-OIL-COLOR DO 630




### PRODUCT PROPERTIES

- + free from aromatics
- + easy to use
- + good gloss stability
- + water and dirt repellent
- + available in 11 colour shades

### STANDARDS AND TESTS

- + DIN 68861-1C chemical resistance
- + complies GISCODE: Ö 60
- + cobalt-free
- + decopaint-compliant

### SCOPE OF APPLICATION



### TYPE OF APPLICATION



### Decopaint-compliant, coloured oil with high hardness

DELIVERY BATCHES  
0,25, 1 und 5 litre

ADDITIONALS  
Thinner: V 608  
Cleaning: V 1415 | V 2244 | V 608 | V 2249

NEW!

## 1C DECO-OIL DO 640C




### PRODUCT PROPERTIES

- + free from aromatics
- + easy to use
- + good gloss stability
- + water and dirt repellent

### STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1C chemical resistance
- + complies GISCODE: Ö 60
- + cobalt-free
- + decopaint-compliant

### SCOPE OF APPLICATION



### TYPE OF APPLICATION



### Decopaint-compliant, transparent oil with high hardness

DELIVERY BATCHES  
1, 5, 10 and 30 litre

ADDITIONALS  
Thinner: V 608  
Cleaning: V 1415 | V 2244 | V 608 | V 2249

Note: Consult a technical advisor for application information.

## 2C JORA-BRILLANT JB 875




### PRODUCT PROPERTIES

- + transparent, brilliant high-gloss lacquer
- + excellent chemical and mechanical resistance
- + for transparent surfaces, can be used as a base and a top coat

### STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 4102-B1 low flammability
- + DIN 68861-1B chemical resistance
- + DIN 53160 resistance to saliva and perspiration
- + EN ISO 2409-GT 0 adhesive strength
- + free of formaldehyde

### SCOPE OF APPLICATION



### TYPE OF APPLICATION



### Solvent-based 2-component high-gloss lacquer with brilliant transparency

GLOSS LEVEL  
high gloss

MIXING RATIO  
2:1 by volume with hardener H 872  
or 2:1 by volume with hardener H 874  
(for fast drying)

DELIVERY BATCHES  
5 and 25 litre

ADDITIONALS  
Thinner: V 2083  
Cleaning: V 2083 | V 2244 | V 803

## 2C JOCOPAN-ROHHOLZEFFEKTLACK H 1861



### PRODUCT PROPERTIES

- + light inherent colour
- + dries up deep matt with a natural effect
- + achieves a smooth to touch surface with high resistance properties

### STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1B chemical resistance
- + DIN 53160 resistance to saliva and perspiration

### SCOPE OF APPLICATION



### TYPE OF APPLICATION



### Solvent-based 2-component special lacquer with natural effect

GLOSS LEVEL  
deep matt

MIXING RATIO  
2:1 by volume with hardener H 1862

DELIVERY BATCHES  
5 and 25 litre

ADDITIONALS  
Thinner: V 2244  
Cleaning: V 1415 | V 2244 | V 803





## 1C+2C DECO-OIL DO 660

VOC-FREE

**VOC-free 1-component and 2-component oil, based on renewable raw materials**

**MIXING RATIO**  
10:1 by volume  
with DECO-OIL-HARDENER DH 613

**DELIVERY BATCHES**  
1, 3 and 25 litre

**ADDITIONALS**  
THINNER: V 608  
CLEANING: V 1415 | V 2244 | V 2249 | V 608


### PRODUCT PROPERTIES

- + good accentuation of the grain, emphasizes the inherent colour of the wood
- + water and dirt repellent
- + the surface has an open-pore appearance with satin-like gloss
- + contains natural raw materials


### STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1C chemical resistance
- + Ö-Norm C 2380:2021 (oil from sustainable resources)
- + complies GISCODE: Ö 10
- + VOC-free
- + cobalt-free
- + decopaint-compliant

### SCOPE OF APPLICATION



### TYPE OF APPLICATION



Note: Consult a technical advisor for application information.  
A 2-component application is recommended for parquet and stairs.



## 1C DECO-NATURWACHS-OIL DO 680

**Decopaint-compliant oil-wax combination**

**DELIVERY BATCHES**  
1, 3 and 10 litre

**ADDITIONALS**  
Thinner: V 608  
Cleaning: V 1415 | V 2244 | V 803 | V 608


### PRODUCT PROPERTIES

- + good penetration behaviour
- + good water resistance
- + the colour and grain of the wood surface are particularly emphasised
- + very suitable for coating wood and furniture parts as well as parquet floors and wooden stairs


### STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1C chemical resistance
- + complies GISCODE: Ö 60
- + free from formaldehyde and cobalt-free
- + decopaint-compliant

### SCOPE OF APPLICATION



### TYPE OF APPLICATION



Note: Consult a technical advisor for application information.



## 1C DECO-OBJECT-OIL DO 670

**Decopaint-compliant natural oil**

**DELIVERY BATCHES**  
1, 3 and 10 litre

**ADDITIONALS**  
THINNER: V 608  
CLEANING: V 1415 | V 2244 | V 803 | V 608


### PRODUCT PROPERTIES

- + suitable for light coloured woods
- + good penetration behaviour
- + excellent water resistance
- + high hardness
- + excellent gloss stability
- + gives the wood an especially natural appearance
- + very suitable for coating wood and furniture parts as well as parquet floors and wooden stairs
- + white inherent colour, brightens the wood shade


### STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1C chemical resistance
- + complies GISCODE: Ö 60
- + cobalt-free
- + decopaint-compliant

### SCOPE OF APPLICATION



### TYPE OF APPLICATION



Note: Consult a technical advisor for application information.



## 1C ECO-HARTWACHS-FINISH EHF 570

**1-component wax oil for surface treatment of parquet floors and stair components in living areas**

**DELIVERY BATCHES**  
1 and 3 litre

**ADDITIONALS**  
Thinner: V 608  
Cleaning: V 608


### PRODUCT PROPERTIES

- + transparent
- + easy to use
- + extremely good penetration behaviour
- + very good water resistance
- + good accentuation of the wood surface
- + very good levelling properties


### STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1C chemical resistance
- + complies GISCODE: Ö 60
- + cobalt-free
- + decopaint-compliant

### SCOPE OF APPLICATION



### TYPE OF APPLICATION





## HYDROSTAIN MODULAR JC63X0

NEW!

**Modular water-based stain system that combines various staining effects**

### DELIVERY BATCHES

Base components: 1, 5 and 25 litre  
Dye solutions: 1 and 5 litre  
Pigment solutions: 1 and 5 litre  
Special shades: 1, 5 and 25 litre

### ADDITIONALS

Cleaning: Water

With the HYDROSTAIN MODULAR DIVERSE JC6350-XXXX, special effects can be achieved, which are not available in the modular system, e.g. stains for dipping and drum coating, colour concentrates etc.

### PRODUCT PROPERTIES

- + modular system for a wide range of applications
- + depending on the base, applicable as standard spray stain, as positive wood stain and as rustic stain
- + also available for various special applications
- + pigments and dyes can be mixed with each other and combined with all bases
- + lightfast in combination with pigment solution
- + brilliant shades in combination with dye solution

### BASE COMPONENTS AVAILABLE AS:

#### HYDROSTAIN MODULAR STANDARD JC6320-XXXX (Stain for spraying without wiping)

- + easy to use
- + universally applicable
- + dye and pigment solutions can be combined


#### HYDROSTAIN MODULAR POSITIVE JC6330-XXXX (Stain for spraying without wiping)

- + achieves an excellent, positive stain pattern
- + most suitable for use on softwoods
- + achieves brilliant colour results in combination with dye solutions


#### HYDROSTAIN MODULAR RUSTIC JC6340-XXXX (Rustic Stain for spraying and wiping)

- + intensive pore structure
- + very good substrate wetting
- + dye and pigment solutions can be combined

### SCOPE OF APPLICATION



### TYPE OF APPLICATION



## CLASSICSTAIN CS 731-833

**Solvent-based stain for spraying and wiping**

### DELIVERY BATCHES

Basic shades 1, 3 and 12 litre  
Card shades 1, 3 and 12 litre  
Special shades 1, 3, 12 and 25 litre

### ADDITIONALS

Cleaning: V 1415 | V 2244 | V 803


### PRODUCT PROPERTIES

- + available in 6 basic shades that can be mixed with each other
- + can be applied in a spraying process, with stain brush or sponge
- + a pore-emphasized stain appearance is generated with the brightener CS 700
- + can be used as a fast drying spraying stain with the brightener CS 800


### AVAILABLE AS

- + CLASSICSTAIN CS 731 in 6 basic shades
- + CLASSICSTAIN CS 732 in 12 card shades
- + CLASSICSTAIN CS 733 for all special shades
- + CLASSICSTAIN CS 832 in 9 card shades
- + CLASSICSTAIN CS 833 for all special shades
- + available as starter set

### SCOPE OF APPLICATION



### TYPE OF APPLICATION



## AQUASTAIN-COLOR ASC 531-533



**Water-based, ready to use pigmented stain**

### DELIVERY BATCHES

Basic shades: 1 and 5 litre  
Special shades: 1, 5 and 25 litre

### ADDITIONALS

Cleaning: Water | AC 460


### PRODUCT PROPERTIES

- + good opacity and good levelling effect
- + easy processing
- + light fast
- + bright, intense colours
- + no grain accentuation
- + applicable under 1-component water lacquers (no washing out of the pigments)
- + as well as under UV lacquers (no change in colour of the stain)
- + all colour shades can be mixed with each other

### AVAILABLE AS

- + AQUASTAIN-COLOR ASC 531 in 9 basic shades
- + AQUASTAIN-COLOR ASC 532 in 21 card shades
- + AQUASTAIN-COLOR ASC 533 for all special shades
- + the colour intensity can be reduced with colourless base ASC 501

### SCOPE OF APPLICATION



### TYPE OF APPLICATION





Kitchen and bathroom furniture surfaces have special requirements. Select from our product portfolio lacquers, oils and stains for the creation of high-quality surfaces.




**28–37**

- 2C PUR-FILLER F 1338
- 2C ACRYPUR-BASE COAT H 23100
- 2C JOCOPHEN-BASE COAT H 2010
- 2C HIGH-SOLID-COLOR H 600X
- 2C COLORLUX-METALLIC H 378
- 2C PUR-SCHICHTER H 136X
- 2C JOCOPHEN-DD-LACQUER H 224X
- 2C GIESS-COLORLUX H 37X
- 2C CLASSIC-EXTREME-RESIST CE 894-X
- 2C JORA ULTRA-MATT RESIST JF2492-0000
- 2C JORA-BRILLANT JB 875

- 1C DECO-OIL DO 640C
- 1C+2C DECO-OIL DO 660
- 1C DECO-OBJECT-OIL DO 670
- 1C DECO-NATURWACHS-OIL DO 680

CLASSICSTAIN CS 731-833

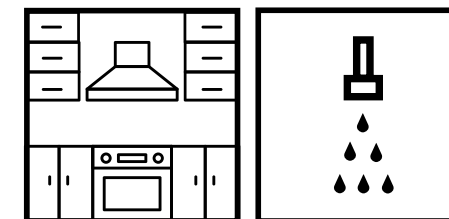

**NO PROBLEM  
WITH HUMIDITY**  
SURFACES FOR KITCHEN AND BATHROOM



## 2C PUR-FILLER F 1338

**Solvent-based, 2-component universal filler**

PUR-FILLER F 1338 (white)  
PUR-FILLER F 1338-S (black)

**MIXING RATIO**  
10:1 by volume with hardener H 132

**DELIVERY BATCHES**  
5, 15 and 25 kg

**ADDITIONALS**  
Thinner: V 2244 | V 1313  
Retarder: V 19  
Cleaning: V 1415 | V 2244 | V 803

### PRODUCT PROPERTIES

- + fast drying
- + very good machine sandability
- + good manual sandability
- + very good adhesion
- + good firmness on vertical surfaces


### STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 4102-B1 low flammability (in combination with JORA-COLOR JC 150 and GIESS-COLORLUX H 37X)
- + EN ISO 2409-GT 0 adhesive strength

### SCOPE OF APPLICATION



### TYPE OF APPLICATION



## ACRYPUR-BASE COAT H 23100

**Solvent-based, transparent 2-component primer on a polyurethane base**

**MIXING RATIO**  
10:1 by volume with hardener H 132

**DELIVERY BATCHES**  
10 litre

**ADDITIONALS**  
Thinner: V 2244  
Retarder: V 19  
Cleaning: V 1415 | V 2244 | V 803

### PRODUCT PROPERTIES

- + easy handling
- + very good filling power
- + excellent sanding

### STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + free of formaldehyde

### SCOPE OF APPLICATION



### TYPE OF APPLICATION



## 2C JOCOPHEN-BASE COAT H 2010

**Solvent-based, transparent 2-component primer as well as a sealing primer for ingredient-rich woods**

**MIXING RATIO**  
2:1 by volume with hardener H 2242

**DELIVERY BATCHES**  
5 litre

**ADDITIONALS**  
Thinner: V 2244  
Retarder: V 19  
Cleaning: V 1415 | V 2244 | V 803


### PRODUCT PROPERTIES

- + easy to use
- + fast drying
- + excellent sandability when dry
- + good sealing properties regarding wood ingredients (very suitable for exotic woods)

### STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + free of formaldehyde

### SCOPE OF APPLICATION



### TYPE OF APPLICATION



## 2C HIGH-SOLID-COLOR H 600X

**Solvent-based 2-component coloured lacquer system with high filling power**

**GLOSS LEVELS**  
H 6000 matt  
H 6007 special matt

**MIXING RATIO**  
2:1 by volume with hardener H 6002

**DELIVERY BATCHES**  
1, 3, 10 and 25 kg

Colour shades available in RAL, Sikkens, NCS, etc.

**ADDITIONALS**  
Thinner: V 2244  
Retarder: V 19  
Cleaning: V 2244 | V 803


### PRODUCT PROPERTIES

- + ensures solvent, cost and time savings
- + metal marking resistant
- + solvent-resistant
- + high scratch and abrasion resistance
- + extremely fast drying
- + very high solids content

### STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1B chemical resistance
- + DIN 53160 resistance to saliva and perspiration
- + PVC resistant

### SCOPE OF APPLICATION



### TYPE OF APPLICATION





## 2C COLORLUX-METALLIC H 378



**Solvent-based 2-component lacquer with a decorative metal effect**

**MIXING RATIO**  
10:1 by volume with hardener H 132

**DELIVERY BATCHES**  
1, 3, 10 and 25 kg

Colour shades available as special adjustments

**ADDITIONALS**  
Thinner: V 2244  
Retarder: V 19  
Cleaning: V 1415 | V 2244 | V 803

### PRODUCT PROPERTIES

- + lightfast
- + metal marking resistant
- + easy handling
- + excellent opacity


### STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1B chemical resistance
- + DIN 53160 resistance to saliva and perspiration
- + PVC resistant

### SCOPE OF APPLICATION



### TYPE OF APPLICATION



Note: Metallic shades for furniture surfaces can be self-mixed with JORA-COLOR JC 150

## 2C PUR-SCHICHTER H 136X



**Solvent-based 2-component clear lacquer on a polyurethane base, usable as primer and topcoat**

**GLOSS LEVEL**  
H 1363 semi-matt, H 1365 matt  
H 1366 deep matt, H 1367 special matt

**MIXING RATIO**  
10:1 by volume with hardener H 1362

**DELIVERY BATCHES**  
5 and 25 litre

**ADDITIONALS**  
Thinner: V 2244  
Retarder: V 19  
Cleaning: V 1415 | V 2244 | V 803


### PRODUCT PROPERTIES

- + suitable as primer and top coat
- + excellent levelling properties
- + very good filling power
- + easy handling
- + achieves a highly resistant, abrasion-proof surface

### STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1B chemical resistance
- + DIN 53160 resistance to saliva and perspiration
- + PVC resistant

### SCOPE OF APPLICATION



### TYPE OF APPLICATION



## 2C JOCOPHEN-DD-LACQUER H 224X



**Solvent-based 2-component clear lacquer / top coat with good filling power and fast drying**

**GLOSS LEVEL**  
H 2243 semi-matt, H 2245 matt  
H 2246 deep matt

**MIXING RATIO**  
2:1 by volume with hardener H 2242

**DELIVERY BATCHES**  
5 litre

**ADDITIONALS**  
Thinner: V 2244  
Retarder: V 19  
Cleaning: V 1415 | V 2244 | V 803


### PRODUCT PROPERTIES

- + recommended use in case of very high demands regarding hardness, resistance to water, alcohol and solvents
- + fast drying
- + good filling power

### STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1B chemical resistance
- + DIN 53160 resistance to saliva and perspiration
- + PVC resistant
- + free of formaldehyde

### SCOPE OF APPLICATION



### TYPE OF APPLICATION



## 2C GIESS-COLORLUX H 37X



**Solvent-based 2-component clear lacquer with excellent transparency and high light fastness**

**GLOSS LEVEL**  
H 371 glossy, H 373 semi-matt, H 375 matt,  
H 376 deep matt, H 376-S2 super matt,  
H 377 special matt

**MIXING RATIO**  
10:1 by volume with hardener H 132

**DELIVERY BATCHES**  
5 and 25 litre (H 371 only in 10 litre batches)

**ADDITIONALS**  
Thinner: V 2044  
Retarder: V 19  
Cleaning: V 1415 | V 2244 | V 803


### PRODUCT PROPERTIES

- + lightfast
- + for curtain coating and spraying
- + long pot life (2 - 3 days)
- + recommended for application as a top coat for JORA-COLOR JC 150

### STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 4102-B1 low flammability
- + DIN 68861-1B chemical resistance
- + DIN 53160 resistance to saliva and perspiration
- + PVC resistant

### SCOPE OF APPLICATION



### TYPE OF APPLICATION





## 2C CLASSIC-EXTREME-RESIST CE 894-X

**Solvent-based 2-component clear lacquer / top coat for interior workpieces exposed to high mechanical stresses**

**GLOSS LEVEL**  
CE 894-5 matt  
CE 894-6 deep matt

**MIXING RATIO**  
10:1 by volume with hardener H 132

**DELIVERY BATCHES**  
5 and 25 litre

**ADDITIONALS**  
Thinner: V 2244  
Retarder: V 19  
Cleaning: V 1415 | V 2244 | V 803


### PRODUCT PROPERTIES

- + anti-fingerprint
- + extremely high resistance to mechanical stress
- + suitable for coating surfaces primed with HIGH-SOLID-BASE COAT H 4500
- + suitable for coating surfaces primed with JOCOPHEN BASE COAT H 2010
- + suitable for coating surfaces that have been coated with JORA-COLOR JC 150
- + fast drying
- + easy handling

### STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1B chemical resistance
- + DIN 53160 resistance to saliva and perspiration
- + EN ISO 2409-GT 0 adhesive strength
- + PVC resistant

### SCOPE OF APPLICATION



### TYPE OF APPLICATION



## 2C JORA-BRILLANT JB 875

**Solvent-based 2-component high-gloss lacquer with brilliant transparency**

**GLOSS LEVEL**  
high gloss

**MIXING RATIO**  
2:1 by volume with hardener H 872  
or 2:1 by volume with hardener H 874  
(for fast drying)

**DELIVERY BATCHES**  
5 and 25 litre

**ADDITIONALS**  
Thinner: V 2083  
Cleaning: V 2083 | V 2244 | V 803


### PRODUCT PROPERTIES

- + transparent, brilliant high-gloss lacquer
- + excellent chemical and mechanical resistance
- + for transparent surfaces, can be used as a base and a top coat

### STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 4102-B1 low flammability
- + DIN 68861-1B chemical resistance
- + DIN 53160 resistance to saliva and perspiration
- + EN ISO 2409-GT 0 adhesive strength
- + free of formaldehyde

### SCOPE OF APPLICATION



### TYPE OF APPLICATION



## 2C JORA ULTRA-MATT RESIST JF2492-0000

**NEW!**

**Solvent-based, ultra-matt 2 component top coat with very good gloss stability**

**GLOSS LEVEL**  
natural matt

**MIXING RATIO**  
100:15 by volume with hardener H 132 (JH2132-0000)

**DELIVERY BATCHES**  
5 and 25 litre

**ADDITIONALS**  
Cleaning: V 1415 | V 2244 | V 803


### PRODUCT PROPERTIES

- + ultra matt gloss level (similar to excimer technology)
- + excellent scratch resistance (anti-scratch)
- + anti-fingerprint
- + very pleasant touch
- + extremely good gloss stability
- + very high chemical resistance
- + suitable for coating surfaces primed with GIESS-COLORLUX H 376 and H 377
- + for light coloured surfaces

### STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + following DIN 68861-1B chemical resistance

### SCOPE OF APPLICATION



### TYPE OF APPLICATION



## 1C DECO-OIL DO 640C

**NEW!**

**Decopaint-compliant, transparent oil with high hardness**

**DELIVERY BATCHES**  
1, 5, 10 and 30 litre

**ADDITIONALS**  
Thinner: V 608  
Cleaning: V 1415 | V 2244 | V 608 | V 2249


### PRODUCT PROPERTIES

- + free from aromatics
- + easy to use
- + good gloss stability
- + water and dirt repellent


### STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1C chemical resistance
- + complies GISCODE: Ö 60
- + cobalt-free
- + decopaint-compliant

### SCOPE OF APPLICATION



### TYPE OF APPLICATION



Note: Consult a technical advisor for application information.





## 1C+2C DECO-OIL DO 660

VOC-FREE

VOC-free 1-component and 2-component oil, based on renewable raw materials

MIXING RATIO  
10:1 by volume  
with DECO-OIL-HARDENER DH 613

DELIVERY BATCHES  
1, 3 and 25 litre

ADDITIONALS  
THINNER: V 608  
CLEANING: V 1415 | V 2244 | V 2249 | V 608


### PRODUCT PROPERTIES

- + good accentuation of the grain, emphasizes the inherent colour of the wood
- + water and dirt repellent
- + the surface has an open-pore appearance with satin-like gloss
- + contains natural raw materials


### STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1C chemical resistance
- + Ö-Norm C 2380:2021 (oil from sustainable resources)
- + complies GISCODE: Ö 10
- + VOC-free
- + cobalt-free
- + decopaint-compliant

### SCOPE OF APPLICATION



### TYPE OF APPLICATION



Note: Consult a technical advisor for application information.  
A 2-component application is recommended for parquet and stairs.



## 1C DECO-OBJECT-OIL DO 670

Decopaint-compliant natural oil

DELIVERY BATCHES  
1, 3 and 10 litre

ADDITIONALS  
THINNER: V 608  
CLEANING: V 1415 | V 2244 | V 803 | V 608


### PRODUCT PROPERTIES

- + suitable for light coloured woods
- + good penetration behaviour
- + excellent water resistance
- + high hardness
- + excellent gloss stability
- + gives the wood an especially natural appearance
- + very suitable for coating wood and furniture parts as well as parquet floors and wooden stairs
- + white inherent colour, brightens the wood shade


### STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1C chemical resistance
- + complies GISCODE: Ö 60
- + cobalt-free
- + decopaint-compliant

### SCOPE OF APPLICATION



### TYPE OF APPLICATION



Note: Consult a technical advisor for application information.



## 1C DECO-NATURWACHS-OIL DO 680

Decopaint-compliant oil-wax combination

DELIVERY BATCHES  
1, 3 and 10 litre

ADDITIONALS  
Thinner: V 608  
Cleaning: V 1415 | V 2244 | V 803 | V 608


### PRODUCT PROPERTIES

- + good penetration behaviour
- + good water resistance
- + the colour and grain of the wood surface are particularly emphasised
- + very suitable for coating wood and furniture parts as well as parquet floors and wooden stairs


### STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1C chemical resistance
- + complies GISCODE: Ö 60
- + free from formaldehyde and cobalt-free
- + decopaint-compliant

### SCOPE OF APPLICATION



### TYPE OF APPLICATION



Note: Consult a technical advisor for application information.



## CLASSICSTAIN CS 731-833

Solvent-based stain for spraying and wiping

DELIVERY BATCHES  
Basic shades 1, 3 and 12 litre  
Card shades 1, 3 and 12 litre  
Special shades 1, 3, 12 and 25 litre

ADDITIONALS  
Cleaning: V 1415 | V 2244 | V 803


### PRODUCT PROPERTIES

- + available in 6 basic shades that can be mixed with each other
- + can be applied in a spraying process, with stain brush or sponge
- + a pore-emphasized stain appearance is generated with the brightener CS 700
- + can be used as a fast drying spraying stain with the brightener CS 800

### AVAILABLE AS

- + CLASSICSTAIN CS 731 in 6 basic shades
- + CLASSICSTAIN CS 732 in 12 card shades
- + CLASSICSTAIN CS 733 for all special shades
- + CLASSICSTAIN CS 832 in 9 card shades
- + CLASSICSTAIN CS 833 for all special shades
- + available as starter set

### SCOPE OF APPLICATION



### TYPE OF APPLICATION





To protect parquet floors and stairs, we offer a wide range of products for heavily used surfaces. Dirt-, scratch- and abrasion-resistant - for the highest demands.

**CHANGES START SMALL**

Did you know that we have been generating electricity with our own photovoltaic system since 2010?  
**PCG – Beyond the surface**

# STEP BY STEP

## PRODUCTS FOR PARQUET AND STAIRS



1C ECO-BASE EB 500  
1C ECO-JOINT-FILL EF 510  
1C ECO-FINISH EF 55X  
1C ECO-HARTWACHS-FINISH EHF 570

**38 – 45**

1C+2C AQUASTEP AS 490

1C DECO-OIL-COLOR DO 630  
1C DECO-OIL DO 640C  
1C+2C DECO-OIL DO 660  
1C DECO-OBJECT-OIL DO 670  
1C DECO-NATURWACHS-OIL DO 680

AQUASTAIN-COLOR ASC 531-533  
HYDROSTAIN MODULAR JC63X0







## 1C ECO-BASE EB 500

DIBt-approval

**Water-based, high-quality 1-component base coat for parquet floorings**

DELIVERY BATCHES  
5 litre

ADDITIONALS  
Thinner: WATER  
Cleaning: WATER


### PRODUCT PROPERTIES

- + base coat for 1C ECO-FINISH 55X
- + effective reduction of the risk of joint bonding
- + practically odourless
- + easy handling
- + very good levelling properties
- + does not contain harmful substances
- + developed according to REACH


### STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + EN ISO 2409-GT 0 adhesive strength
- + DIBt-approval
- + GISCODE: W2+
- + decopaint-compliant

### SCOPE OF APPLICATION



### TYPE OF APPLICATION



## 1C ECO-FINISH EF 55X

DIBt-approval

**Water-based 1-component parquet lacquer for the surface treatment of parquet floors in living and public areas**

GLOSS LEVEL  
EF 553 semi-matt  
EF 555 matt

DELIVERY BATCHES  
5 litre

ADDITIONALS  
Thinner: Water  
Cleaning: Water


### PRODUCT PROPERTIES

- + good abrasion and wear resistance
- + easy handling
- + very good levelling properties
- + resistant to common household chemicals
- + does not contain harmful substances
- + developed according to REACH

### STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + resistant to cream
- + EN ISO 2409-GT 0 adhesive strength
- + DIBt-approval
- + GISCODE: W2+
- + decopaint-compliant

### SCOPE OF APPLICATION



### TYPE OF APPLICATION



## 1C ECO-JOINT-FILL EF 510

**Water-based joint filler with high solids content for fast filling of joints and cracks in wooden floorings**

DELIVERY BATCHES  
4 litre

ADDITIONALS  
Cleaning: Water


### PRODUCT PROPERTIES

- + extremely good filling properties
- + environmentally friendly
- + odourless
- + extremely fast drying
- + good sanding properties
- + for joints up to 3 mm wide (must be filled with wood dust)

### STANDARDS AND TESTS

- + GISCODE: W2+

### SCOPE OF APPLICATION



### TYPE OF APPLICATION



## 1C ECO-HARTWACHS-FINISH EHF 570

**1-component wax oil for surface treatment of parquet floors and stair components in living areas**

DELIVERY BATCHES  
1 and 3 litre

ADDITIONALS  
Thinner: V 608  
Cleaning: V 608


### PRODUCT PROPERTIES

- + transparent
- + easy to use
- + extremely good penetration behaviour
- + very good water resistance
- + good accentuation of the wood surface
- + very good levelling properties

### STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1C chemical resistance
- + complies GISCODE: Ö 60
- + cobalt-free
- + decopaint-compliant

### SCOPE OF APPLICATION



### TYPE OF APPLICATION





## 1C+2C AQUASTEP AS 490

**Water-based 1+2 component stair lacquer with good light stability**

**GLOSS LEVEL**  
matt (-5)  
semi-matt (-3)

**MIXING RATIO**  
10:1 by volume with AQUAHARDENER AH 410

**DELIVERY BATCHES**  
10 and 25 kg

**ADDITIONALS**  
Thinner: Water  
Cleaning: Water | AC 460


### PRODUCT PROPERTIES

- + excellent light stability
- + good accentuation of the grain
- + easy handling
- + standing and suspended parts can be coated without problems
- + even levelling and high abrasion resistance

### STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + following DIN 68861-1B chemical resistance
- + EN ISO 2409-GT 0 adhesive strength
- + slip resistance class R10 in combination with AQUA PRO-GRIP APG 402
- + resistance to cream
- + decopaint-compliant

### SCOPE OF APPLICATION



### TYPE OF APPLICATION



## 1C DECO-OIL-COLOR DO 630

**NEW!**

**Decopaint-compliant, coloured oil with high hardness**

**DELIVERY BATCHES**  
0,25, 1 und 5 litre

**ADDITIONALS**  
Thinner: V 608  
Cleaning: V 1415 | V 2244 | V 608 | V 2249


### PRODUCT PROPERTIES

- + free from aromatics
- + easy to use
- + good gloss stability
- + water and dirt repellent
- + available in 11 colour shades


### STANDARDS AND TESTS

- + DIN 68861-1C chemical resistance
- + complies GISCODE: Ö 60
- + cobalt-free
- + decopaint-compliant

### SCOPE OF APPLICATION



### TYPE OF APPLICATION



## 1C DECO-OIL DO 640C

**NEW!**

**Decopaint-compliant, transparent oil with high hardness**

**DELIVERY BATCHES**  
1, 5, 10 and 30 litre

**ADDITIONALS**  
Thinner: V 608  
Cleaning: V 1415 | V 2244 | V 608 | V 2249


### PRODUCT PROPERTIES

- + free from aromatics
- + easy to use
- + good gloss stability
- + water and dirt repellent


### STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1C chemical resistance
- + complies GISCODE: Ö 60
- + cobalt-free
- + decopaint-compliant

### SCOPE OF APPLICATION



### TYPE OF APPLICATION



Note: Consult a technical advisor for application information.

**PARQUET & STAIRS**



## 1C+2C DECO-OIL DO 660

**VOC-FREE**

**VOC-free 1-component and 2-component oil, based on renewable raw materials**

**MIXING RATIO**  
10:1 by volume  
with DECO-OIL-HARDENER DH 613

**DELIVERY BATCHES**  
1, 3 and 25 litre

**ADDITIONALS**  
THINNER: V 608  
CLEANING: V 1415 | V 2244 | V 2249 | V 608


### PRODUCT PROPERTIES

- + good accentuation of the grain, emphasizes the inherent colour of the wood
- + water and dirt repellent
- + the surface has an open-pore appearance with satin-like gloss
- + contains natural raw materials


### STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1C chemical resistance
- + Ö-Norm C 2380:2021 (oil from sustainable resources)
- + complies GISCODE: Ö 10
- + VOC-free
- + cobalt-free
- + decopaint-compliant

### SCOPE OF APPLICATION



### TYPE OF APPLICATION



Note: Consult a technical advisor for application information.  
A 2-component application is recommended for parquet and stairs.





## 1C DECO-OBJECT-OIL DO 670

### Decopaint-compliant natural oil

DELIVERY BATCHES  
1, 3 and 10 litre

ADDITIONALS  
THINNER: V 608  
CLEANING: V 1415 | V 2244 | V 803 | V 608


#### PRODUCT PROPERTIES

- + suitable for light coloured woods
- + good penetration behaviour
- + excellent water resistance
- + high hardness
- + excellent gloss stability
- + gives the wood an especially natural appearance
- + very suitable for coating wood and furniture parts as well as parquet floors and wooden stairs
- + white inherent colour, brightens the wood shade


#### STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1C chemical resistance
- + complies GISCODE: Ö 60
- + cobalt-free
- + decopaint-compliant

#### SCOPE OF APPLICATION



#### TYPE OF APPLICATION



Note: Consult a technical advisor for application information.



## 1C DECO-NATURWACHS-OIL DO 680

### Decopaint-compliant oil-wax combination

DELIVERY BATCHES  
1, 3 and 10 litre

ADDITIONALS  
Thinner: V 608  
Cleaning: V 1415 | V 2244 | V 803 | V 608


#### PRODUCT PROPERTIES

- + good penetration behaviour
- + good water resistance
- + the colour and grain of the wood surface are particularly emphasised
- + very suitable for coating wood and furniture parts as well as parquet floors and wooden stairs


#### STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1C chemical resistance
- + complies GISCODE: Ö 60
- + free from formaldehyde and cobalt-free
- + decopaint-compliant

#### SCOPE OF APPLICATION



#### TYPE OF APPLICATION



Note: Consult a technical advisor for application information.



## AQUASTAIN-COLOR ASC 531-533

### Water-based, ready to use pigmented stain

DELIVERY BATCHES  
Basic shades: 1 and 5 litre  
Special shades: 1, 5 and 25 litre

ADDITIONALS  
Cleaning: Water | AC 460


#### PRODUCT PROPERTIES

- + good opacity and good levelling effect
- + easy processing
- + light fast
- + bright, intense colours
- + no grain accentuation
- + applicable under 1-component water lacquers (no washing out of the pigments)
- + as well as under UV lacquers (no change in colour of the stain)
- + all colour shades can be mixed with each other

#### AVAILABLE AS

- + AQUASTAIN-COLOR ASC 531 in 9 basic shades
- + AQUASTAIN-COLOR ASC 532 in 21 card shades
- + AQUASTAIN-COLOR ASC 533 for all special shades
- + the colour intensity can be reduced with colourless base ASC 501

#### SCOPE OF APPLICATION



#### TYPE OF APPLICATION



## HYDROSTAIN MODULAR JC63X0

NEW!

### Modular water-based stain system that combines various staining effects

DELIVERY BATCHES  
Base components: 1, 5 and 25 litre  
Dye solutions: 1 and 5 litre  
Pigment solutions: 1 and 5 litre  
Special shades: 1, 5 and 25 litre

ADDITIONALS  
Cleaning: Water

With the HYDROSTAIN MODULAR DIVERSE JC6350-XXXX, special effects can be achieved, which are not available in the modular system, e.g. stains for dipping and drum coating, colour concentrates etc.

#### PRODUCT PROPERTIES

- + modular system for a wide range of applications
- + depending on the base, applicable as standard spray stain, as positive wood stain and as rustic stain
- + also available for various special applications
- + pigments and dyes can be mixed with each other and combined with all bases
- + lightfast in combination with pigment solution
- + brilliant shades in combination with dye solution

#### BASE COMPONENTS AVAILABLE AS:

HYDROSTAIN MODULAR STANDARD JC6320-XXXX (Stain for spraying without wiping)

- + easy to use
- + universally applicable
- + dye and pigment solutions can be combined


HYDROSTAIN MODULAR POSITIVE JC6330-XXXX (Stain for spraying without wiping)

- + achieves an excellent, positive stain pattern
- + most suitable for use on softwoods
- + achieves brilliant colour results in combination with dye solutions


HYDROSTAIN MODULAR RUSTIC JC6340-XXXX (Rustic Stain for spraying and wiping)

- + intensive pore structure
- + very good substrate wetting
- + dye and pigment solutions can be combined

#### SCOPE OF APPLICATION



#### TYPE OF APPLICATION





## SIMPLY INVITING


### SURFACE DIVERSITY FOR DOORS

Water-based lacquers and oils for interior doors, door panels and frames. Our portfolio offers opaque, glazing and clear lacquers as well as oiled surfaces.

1C+2C AQUA-FILLER AF 430  
1C+2C AQUA MAGIC-COLOR AMC 462  
2C AQUA-NATUREFFEKT AN 420  
1C+2C AQUA-CLEAR AC 475  
1C+2C AQUA-CLEAR LOW AC 477  
1C+2C AQUASTEPP AS 490  
  
1C DECO-OIL-COLOR DO 630  
1C DECO-OIL DO 640C  
1C+2C DECO-OIL DO 660  
1C DECO-OBJECT-OIL DO 670  
1C DECO-NATURWACHS-OIL DO 680

**46 – 53**

HYDROSTAIN MODULAR JC63X0







## 1C+2C AQUA-FILLER AF 430

**Water-based 1+2-component universal filler with excellent filling power and good sandability**

AQUA-FILLER AF 430 (white)  
AQUA-FILLER AF 430-S (black)

**MIXING RATIO**  
10:1 by volume with AQUAHARDENER AH 412

**DELIVERY BATCHES**  
7 and 25 kg

**ADDITIONALS**  
Thinner: Water  
Cleaning: Water | AC 460


### PRODUCT PROPERTIES

- + overcoatable with all our colour lacquer systems from JORDAN Lacke
- + excellently sandable
- + excellent filling power
- + perfect adhesion
- + excellent firmness on vertical surfaces

### STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 4102-B1 low flammability (in combination with AQUA-MAGIC-COLOR AMC 462) (under examination)
- + decopaint-compliant

### SCOPE OF APPLICATION



### TYPE OF APPLICATION



## 1C+2C AQUA MAGIC-COLOR AMC 462

**Water-based 1+2 component coloured lacquer harmonising quality demand and environmental awareness**

**GLOSS LEVEL**  
matt

**MIXING RATIO**  
10:1 by volume with AQUAHARDENER AH 412

**DELIVERY BATCHES**  
3, 10 und 25 kg

Colour shades available in RAL, Sikkens, NCS, etc

**ADDITIONALS**  
Thinner: Water  
Cleaning: Water | AC 460


### PRODUCT PROPERTIES

- + very high light stability
- + very high opacity
- + very good sanding marks coverage
- + high abrasion and scratch resistance
- + excellent levelling properties
- + easy to use

### STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 4102-B1 low flammability (under examination)
- + DIN 53160 resistance to saliva and perspiration (under examination)
- + EN ISO 2409-GT 0 adhesive strength
- + decopaint-compliant

### SCOPE OF APPLICATION



### TYPE OF APPLICATION



## 2C AQUA-NATUREFFEKT AN 420

**Water-based 2 component natural effect lacquer with high resistance**

**GLOSS LEVEL**  
natural matt

**MIXING RATIO**  
10:1 by volume with AQUAHARDENER AH 410

**DELIVERY BATCHES**  
5 and 25 kg

**ADDITIONALS**  
Thinner: Water  
Cleaning: Water | AC 460


### PRODUCT PROPERTIES

- + high mechanical resistance
- + very good chemical resistance
- + dries to a raw wood-like natural matt finish
- + pleasant touch

### STANDARDS AND TESTS

- + following DIN 68861-1B chemical resistance
- + DIN 53160 resistance to saliva and perspiration
- + EN 71, part 3, free of extractable heavy metals
- + EN ISO 2409-GT 0 adhesive strength
- + decopaint-compliant

### SCOPE OF APPLICATION



### TYPE OF APPLICATION



## 1C+2C AQUA-CLEAR AC 475

**Water-based 1+2 component clear lacquer with high scratch and abrasion resistance**

**GLOSS LEVEL**  
- 10 (deep matt)  
- 20 (matt)  
- 30 (semi-matt)

**MIXING RATIO**  
10:1 by volume with AQUAHARDENER AH 412

**DELIVERY BATCHES**  
10 and 25 kg

**ADDITIONALS**  
Thinner: Water  
Cleaning: Water | AC 460


### PRODUCT PROPERTIES

- + very high light stability
- + excellent transparency
- + high abrasion and scratch resistance
- + very good accentuation of the grain
- + easy to use


### STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 4102-B1 low flammability (under examination)
- + DIN 53160 resistance to saliva and perspiration (under examination)
- + EN ISO 2409-GT 0 adhesive strength
- + decopaint-compliant

### SCOPE OF APPLICATION



### TYPE OF APPLICATION





## 1C+2C AQUA-CLEAR LOW AC 477

**Water-based 1+2 component clear lacquer for coating off porous woods**

**GLOSS LEVEL**  
 - 10 (deep matt)  
 - 20 (matt)  
 - 30 (semi-matt)

**MIXING RATIO**  
 10:1 by volume with AQUAHARDENER AH 412

**DELIVERY BATCHES**  
 10 and 25 kg

**ADDITIONALS**  
 Thinner: Water  
 Cleaning: Water | AC 460


### PRODUCT PROPERTIES

- + solids-reduced variant of AC 475
- + especially suitable for porous woods
- + very high light stability
- + particularly high transparency
- + very good accentuation of the grain
- + easy to use


### STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 4102-B1 low flammability (under examination)
- + EN ISO 2409-GT 0 adhesive strength
- + DIN 53160 resistance to saliva and perspiration (under examination)
- + decopaint-compliant

### SCOPE OF APPLICATION



### TYPE OF APPLICATION



## 1C+2C AQUASTEP AS 490

**Water-based 1+2 component stair lacquer with good light stability**

**GLOSS LEVEL**  
 matt (-5)  
 semi-matt (-3)

**MIXING RATIO**  
 10:1 by volume with AQUAHARDENER AH 410

**DELIVERY BATCHES**  
 10 and 25 kg

**ADDITIONALS**  
 Thinner: Water  
 Cleaning: Water | AC 460


### PRODUCT PROPERTIES

- + excellent light stability
- + good accentuation of the grain
- + easy handling
- + standing and suspended parts can be coated without problems
- + even levelling and high abrasion resistance

### STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + following DIN 68861-1B chemical resistance
- + EN ISO 2409-GT 0 adhesive strength
- + slip resistance class R10 in combination with AQUA PRO-GRIP APG 402
- + resistance to cream
- + decopaint-compliant

### SCOPE OF APPLICATION



### TYPE OF APPLICATION



## 1C DECO-OIL-COLOR DO 630

**NEW!**

**Decopaint-compliant, coloured oil with high hardness**

**DELIVERY BATCHES**  
 0,25, 1 und 5 litre

**ADDITIONALS**  
 Thinner: V 608  
 Cleaning: V 1415 | V 2244 | V 608 | V 2249


### PRODUCT PROPERTIES

- + free from aromatics
- + easy to use
- + good gloss stability
- + water and dirt repellent
- + available in 11 colour shades


### STANDARDS AND TESTS

- + DIN 68861-1C chemical resistance
- + complies GISCODE: Ö 60
- + cobalt-free
- + decopaint-compliant

### SCOPE OF APPLICATION



### TYPE OF APPLICATION



## 1C DECO-OIL DO 640C

**NEW!**

**Decopaint-compliant, transparent oil with high hardness**

**DELIVERY BATCHES**  
 1, 5, 10 and 30 litre

**ADDITIONALS**  
 Thinner: V 608  
 Cleaning: V 1415 | V 2244 | V 608 | V 2249


### PRODUCT PROPERTIES

- + free from aromatics
- + easy to use
- + good gloss stability
- + water and dirt repellent


### STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1C chemical resistance
- + complies GISCODE: Ö 60
- + cobalt-free
- + decopaint-compliant

### SCOPE OF APPLICATION



### TYPE OF APPLICATION



Note: Consult a technical advisor for application information.





## 1C+2C DECO-OIL DO 660

VOC-FREE

VOC-free 1-component and 2-component oil, based on renewable raw materials

MIXING RATIO  
10:1 by volume  
with DECO-OIL-HARDENER DH 613

DELIVERY BATCHES  
1, 3 and 25 litre

ADDITIONALS  
THINNER: V 608  
CLEANING: V 1415 | V 2244 | V 2249 | V 608


### PRODUCT PROPERTIES

- + good accentuation of the grain, emphasizes the inherent colour of the wood
- + water and dirt repellent
- + the surface has an open-pore appearance with satin-like gloss
- + contains natural raw materials


### STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1C chemical resistance
- + Ö-Norm C 2380:2021 (oil from sustainable resources)
- + complies GISCODE: Ö 10
- + VOC-free
- + cobalt-free
- + decopaint-compliant

### SCOPE OF APPLICATION



### TYPE OF APPLICATION



Note: Consult a technical advisor for application information.  
A 2-component application is recommended for parquet and stairs.



## 1C DECO-NATURWACHS-OIL DO 680

Decopaint-compliant oil-wax combination

DELIVERY BATCHES  
1, 3 and 10 litre

ADDITIONALS  
Thinner: V 608  
Cleaning: V 1415 | V 2244 | V 803 | V 608


### PRODUCT PROPERTIES

- + good penetration behaviour
- + good water resistance
- + the colour and grain of the wood surface are particularly emphasised
- + very suitable for coating wood and furniture parts as well as parquet floors and wooden stairs


### STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1C chemical resistance
- + complies GISCODE: Ö 60
- + free from formaldehyde and cobalt-free
- + decopaint-compliant

### SCOPE OF APPLICATION



### TYPE OF APPLICATION



Note: Consult a technical advisor for application information.

DOORS



## 1C DECO-OBJECT-OIL DO 670

Decopaint-compliant natural oil

DELIVERY BATCHES  
1, 3 and 10 litre

ADDITIONALS  
THINNER: V 608  
CLEANING: V 1415 | V 2244 | V 803 | V 608


### PRODUCT PROPERTIES

- + suitable for light coloured woods
- + good penetration behaviour
- + excellent water resistance
- + high hardness
- + excellent gloss stability
- + gives the wood an especially natural appearance
- + very suitable for coating wood and furniture parts as well as parquet floors and wooden stairs
- + white inherent colour, brightens the wood shade


### STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1C chemical resistance
- + complies GISCODE: Ö 60
- + cobalt-free
- + decopaint-compliant

### SCOPE OF APPLICATION



### TYPE OF APPLICATION



Note: Consult a technical advisor for application information.



## HYDROSTAIN MODULAR JC63X0

NEW!

Modular water-based stain system that combines various staining effects

DELIVERY BATCHES  
Base components: 1, 5 and 25 litre  
Dye solutions: 1 and 5 litre  
Pigment solutions: 1 and 5 litre  
Special shades: 1, 5 and 25 litre

ADDITIONALS  
Cleaning: Water

With the HYDROSTAIN MODULAR DIVERSE JC6350-XXXX, special effects can be achieved, which are not available in the modular system, e.g. stains for dipping and drum coating, colour concentrates etc.

### PRODUCT PROPERTIES

- + modular system for a wide range of applications
- + depending on the base, applicable as standard spray stain, as positive wood stain and as rustic stain
- + also available for various special applications
- + pigments and dyes can be mixed with each other and combined with all bases
- + lightfast in combination with pigment solution
- + brilliant shades in combination with dye solution


### BASE COMPONENTS AVAILABLE AS:

- HYDROSTAIN MODULAR STANDARD JC6320-XXXX (Stain for spraying without wiping)
- + easy to use
  - + universally applicable
  - + dye and pigment solutions can be combined


- HYDROSTAIN MODULAR POSITIVE JC6330-XXXX (Stain for spraying without wiping)
- + achieves an excellent, positive stain pattern
  - + most suitable for use on softwoods
  - + achieves brilliant colour results in combination with dye solutions

- HYDROSTAIN MODULAR RUSTIC JC6340-XXXX (Rustic Stain for spraying and wiping)
- + intensive pore structure
  - + very good substrate wetting
  - + dye and pigment solutions can be combined

### SCOPE OF APPLICATION



### TYPE OF APPLICATION







# FOR LEFT, RIGHT AND ABOVE

PRODUCTS FOR INTERIOR FITTINGS

For a healthy indoor climate - with our decopaint-compliant water-based lacquers, oils and stains for coating wooden ceilings, wall panelling, etc. Choose from a wide range of products.

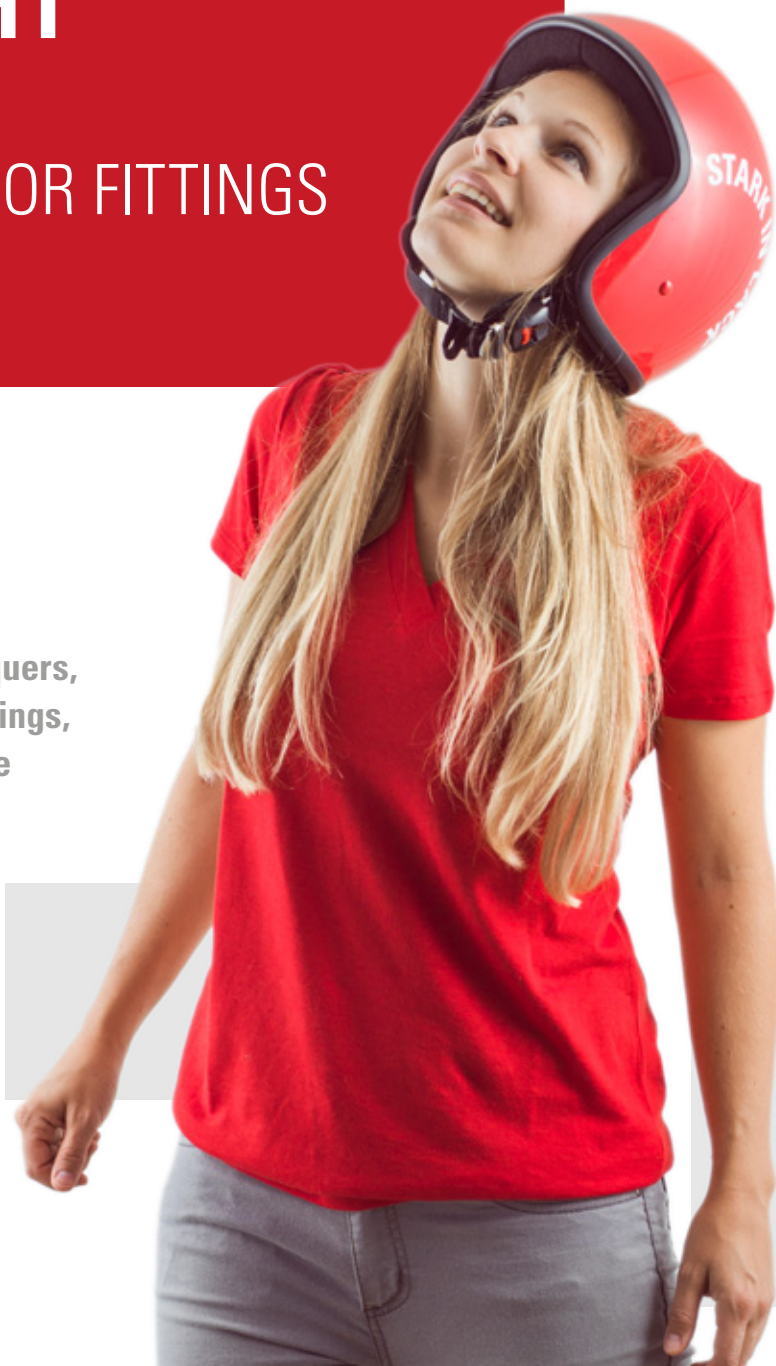

- 1C+2C AQUA-FILLER AF 430
- 1C+2C AQUA MAGIC-COLOR AMC 462
- 2C AQUA-NATUREFFEKT AN 420
- 1C+2C AQUA-CLEAR AC 475
- 1C+2C AQUA-CLEAR LOW AC 477
- 1C+2C AQUASTEP AS 490
- 1C AQUA SUN-PROTECT SP 480

**54 – 63**

- 1C DECO-OIL-COLOR DO 630
- 1C DECO-OIL DO 640C
- 1C+2C DECO-OIL DO 660
- 1C DECO-OBJECT-OIL DO 670
- 1C DECO-NATURWACHS-OIL DO 680

HYDROSTAIN MODULAR JC63X0



## 1C+2C AQUA-FILLER AF 430

**Water-based 1+2-component universal filler with excellent filling power and good sandability**

AQUA-FILLER AF 430 (white)  
AQUA-FILLER AF 430-S (black)

**MIXING RATIO**  
10:1 by volume with AQUAHARDENER AH 412

**DELIVERY BATCHES**  
7 and 25 kg

**ADDITIONALS**  
Thinner: Water  
Cleaning: Water | AC 460


### PRODUCT PROPERTIES

- + overcoatable with all our colour lacquer systems from JORDAN Lacke
- + excellently sandable
- + excellent filling power
- + perfect adhesion
- + excellent firmness on vertical surfaces

### STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 4102-B1 low flammability (in combination with AQUA-MAGIC-COLOR AMC 462) (under examination)
- + decopaint-compliant

### SCOPE OF APPLICATION



### TYPE OF APPLICATION



## 1C+2C AQUA MAGIC-COLOR AMC 462

**Water-based 1+2 component coloured lacquer harmonising quality demand and environmental awareness**

**GLOSS LEVEL**  
matt

**MIXING RATIO**  
10:1 by volume with AQUAHARDENER AH 412

**DELIVERY BATCHES**  
3, 10 und 25 kg

Colour shades available in RAL, Sikkens, NCS, etc

**ADDITIONALS**  
Thinner: Water  
Cleaning: Water | AC 460


### PRODUCT PROPERTIES

- + very high light stability
- + very high opacity
- + very good sanding marks coverage
- + high abrasion and scratch resistance
- + excellent levelling properties
- + easy to use

### STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 4102-B1 low flammability (under examination)
- + DIN 53160 resistance to saliva and perspiration (under examination)
- + EN ISO 2409-GT 0 adhesive strength
- + decopaint-compliant

### SCOPE OF APPLICATION



### TYPE OF APPLICATION



## 2C AQUA-NATUREFFEKT AN 420

**Water-based 2 component natural effect lacquer with high resistance**

**GLOSS LEVEL**  
natural matt

**MIXING RATIO**  
10:1 by volume with AQUAHARDENER AH 410

**DELIVERY BATCHES**  
5 and 25 kg

**ADDITIONALS**  
Thinner: Water  
Cleaning: Water | AC 460


### PRODUCT PROPERTIES

- + high mechanical resistance
- + very good chemical resistance
- + dries to a raw wood-like natural matt finish
- + pleasant touch

### STANDARDS AND TESTS

- + following DIN 68861-1B chemical resistance
- + DIN 53160 resistance to saliva and perspiration
- + EN 71, part 3, free of extractable heavy metals
- + EN ISO 2409-GT 0 adhesive strength
- + decopaint-compliant

### SCOPE OF APPLICATION



### TYPE OF APPLICATION



## 1C+2C AQUA-CLEAR AC 475

**Water-based 1+2 component clear lacquer with high scratch and abrasion resistance**

**GLOSS LEVEL**  
- 10 (deep matt)  
- 20 (matt)  
- 30 (semi-matt)

**MIXING RATIO**  
10:1 by volume with AQUAHARDENER AH 412

**DELIVERY BATCHES**  
10 and 25 kg

**ADDITIONALS**  
Thinner: Water  
Cleaning: Water | AC 460


### PRODUCT PROPERTIES

- + very high light stability
- + excellent transparency
- + high abrasion and scratch resistance
- + very good accentuation of the grain
- + easy to use


### STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 4102-B1 low flammability (under examination)
- + DIN 53160 resistance to saliva and perspiration (under examination)
- + EN ISO 2409-GT 0 adhesive strength
- + decopaint-compliant

### SCOPE OF APPLICATION



### TYPE OF APPLICATION







## 1C+2C AQUA-CLEAR LOW AC 477

**Water-based 1+2 component clear lacquer for coating off porous woods**

**GLOSS LEVEL**  
 - 10 (deep matt)  
 - 20 (matt)  
 - 30 (semi-matt)

**MIXING RATIO**  
 10:1 by volume with AQUAHARDENER AH 412

**DELIVERY BATCHES**  
 10 and 25 kg

**ADDITIONALS**  
 Thinner: Water  
 Cleaning: Water | AC 460


### PRODUCT PROPERTIES

- + solids-reduced variant of AC 475
- + especially suitable for porous woods
- + very high light stability
- + particularly high transparency
- + very good accentuation of the grain
- + easy to use


### STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 4102-B1 low flammability (under examination)
- + EN ISO 2409-GT 0 adhesive strength
- + DIN 53160 resistance to saliva and perspiration (under examination)
- + decopaint-compliant

### SCOPE OF APPLICATION



### TYPE OF APPLICATION



## 1C AQUA SUN-PROTECT SP 480

**Serves as a very good UV protection and protects the wood against the natural yellowing process**

**GLOSS LEVEL**  
 natural matt

**Delivery batches**  
 5, 10 and 25 kg

**ADDITIONALS**  
 Thinner: Water  
 Cleaning: Water | AC 460

### PRODUCT PROPERTIES

- + excellent light stability
- + very pleasant touch
- + easy handling
- + fast drying
- + quickly stackable


### STANDARDS AND TESTS

- + decopaint-compliant

### SCOPE OF APPLICATION



### TYPE OF APPLICATION



## 1C+2C AQUASTEP AS 490

**Water-based 1+2 component stair lacquer with good light stability**

**GLOSS LEVEL**  
 matt (-5)  
 semi-matt (-3)

**MIXING RATIO**  
 10:1 by volume with AQUAHARDENER AH 410

**DELIVERY BATCHES**  
 10 and 25 kg

**ADDITIONALS**  
 Thinner: Water  
 Cleaning: Water | AC 460


### PRODUCT PROPERTIES

- + excellent light stability
- + good accentuation of the grain
- + easy handling
- + standing and suspended parts can be coated without problems
- + even levelling and high abrasion resistance

### STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + following DIN 68861-1B chemical resistance
- + EN ISO 2409-GT 0 adhesive strength
- + slip resistance class R10 in combination with AQUA PRO-GRIP APG 402
- + resistance to cream
- + decopaint-compliant

### SCOPE OF APPLICATION



### TYPE OF APPLICATION





## 1C DECO-OIL-COLOR DO 630

NEW!

**Decopaint-compliant, coloured oil with high hardness**

DELIVERY BATCHES  
0,25, 1 und 5 litre

ADDITIONALS  
Thinner: V 608  
Cleaning: V 1415 | V 2244 | V 608 | V 2249


### PRODUCT PROPERTIES

- + free from aromatics
- + easy to use
- + good gloss stability
- + water and dirt repellent
- + available in 11 colour shades


### STANDARDS AND TESTS

- + DIN 68861-1C chemical resistance
- + complies GISCODE: Ö 60
- + cobalt-free
- + decopaint-compliant

### SCOPE OF APPLICATION



### TYPE OF APPLICATION



## 1C+2C DECO-OIL DO 660

VOC-FREE

**VOC-free 1-component and 2-component oil, based on renewable raw materials**

MIXING RATIO  
10:1 by volume  
with DECO-OIL-HARDENER DH 613

DELIVERY BATCHES  
1, 3 and 25 litre

ADDITIONALS  
THINNER: V 608  
CLEANING: V 1415 | V 2244 | V 2249 | V 608


### PRODUCT PROPERTIES

- + good accentuation of the grain, emphasizes the inherent colour of the wood
- + water and dirt repellent
- + the surface has an open-pore appearance with satin-like gloss
- + contains natural raw materials


### STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1C chemical resistance
- + Ö-Norm C 2380:2021 (oil from sustainable resources)
- + complies GISCODE: Ö 10
- + VOC-free
- + cobalt-free
- + decopaint-compliant

### SCOPE OF APPLICATION



### TYPE OF APPLICATION



Note: Consult a technical advisor for application information.  
A 2-component application is recommended for parquet and stairs.



## 1C DECO-OIL DO 640C

NEW!

**Decopaint-compliant, transparent oil with high hardness**

DELIVERY BATCHES  
1, 5, 10 and 30 litre

ADDITIONALS  
Thinner: V 608  
Cleaning: V 1415 | V 2244 | V 608 | V 2249


### PRODUCT PROPERTIES

- + free from aromatics
- + easy to use
- + good gloss stability
- + water and dirt repellent


### STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1C chemical resistance
- + complies GISCODE: Ö 60
- + cobalt-free
- + decopaint-compliant

### SCOPE OF APPLICATION



### TYPE OF APPLICATION



Note: Consult a technical advisor for application information.



## 1C DECO-OBJECT-OIL DO 670

**Decopaint-compliant natural oil**

DELIVERY BATCHES  
1, 3 and 10 litre

ADDITIONALS  
THINNER: V 608  
CLEANING: V 1415 | V 2244 | V 803 | V 608


### PRODUCT PROPERTIES

- + suitable for light coloured woods
- + good penetration behaviour
- + excellent water resistance
- + high hardness
- + excellent gloss stability
- + gives the wood an especially natural appearance
- + very suitable for coating wood and furniture parts as well as parquet floors and wooden stairs
- + white inherent colour, brightens the wood shade

### STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1C chemical resistance
- + complies GISCODE: Ö 60
- + cobalt-free
- + decopaint-compliant

### SCOPE OF APPLICATION



### TYPE OF APPLICATION



Note: Consult a technical advisor for application information.



## 1C DECO-NATURWACHS-OIL DO 680

### Decopaint-compliant oil-wax combination

DELIVERY BATCHES  
1, 3 and 10 litre

ADDITIONALS  
Thinner: V 608  
Cleaning: V 1415 | V 2244 | V 803 | V 608


#### PRODUCT PROPERTIES

- + good penetration behaviour
- + good water resistance
- + the colour and grain of the wood surface are particularly emphasised
- + very suitable for coating wood and furniture parts as well as parquet floors and wooden stairs


#### STANDARDS AND TESTS

- + EN 71, part 3, free of extractable heavy metals
- + DIN 68861-1C chemical resistance
- + complies GISCODE: Ö 60
- + free from formaldehyde and cobalt-free
- + decopaint-compliant

#### SCOPE OF APPLICATION



#### TYPE OF APPLICATION



Note: Consult a technical advisor for application information.



## HYDROSTAIN MODULAR JC63X0

NEW!

### Modular water-based stain system that combines various staining effects

#### DELIVERY BATCHES

Base components: 1, 5 and 25 litre  
Dye solutions: 1 and 5 litre  
Pigment solutions: 1 and 5 litre  
Special shades: 1, 5 and 25 litre

#### ADDITIONALS

Cleaning: Water

With the HYDROSTAIN MODULAR DIVERSE JC6350-XXXX, special effects can be achieved, which are not available in the modular system, e.g. stains for dipping and drum coating, colour concentrates etc.

#### PRODUCT PROPERTIES

- + modular system for a wide range of applications
- + depending on the base, applicable as standard spray stain, as positive wood stain and as rustic stain
- + also available for various special applications
- + pigments and dyes can be mixed with each other and combined with all bases
- + lightfast in combination with pigment solution
- + brilliant shades in combination with dye solution

#### BASE COMPONENTS AVAILABLE AS:

HYDROSTAIN MODULAR STANDARD JC6320-XXXX (Stain for spraying without wiping)

- + easy to use
- + universally applicable
- + dye and pigment solutions can be combined


HYDROSTAIN MODULAR POSITIVE JC6330-XXXX (Stain for spraying without wiping)

- + achieves an excellent, positive stain pattern
- + most suitable for use on softwoods
- + achieves brilliant colour results in combination with dye solutions


HYDROSTAIN MODULAR RUSTIC JC6340-XXXX (Rustic Stain for spraying and wiping)

- + intensive pore structure
- + very good substrate wetting
- + dye and pigment solutions can be combined

#### SCOPE OF APPLICATION



#### TYPE OF APPLICATION







The eco-Institute is one of the most experienced German laboratories for indoor air analysis and has been committed to healthy indoor air for more than 30 years. The tests set the highest requirements for the most common indoor pollutants and only tolerate significantly lower emission limits than many other standards.

The experts of the eco-Institute confirm that our Natureline products not only protect your wood outdoors, but also ensure healthy indoor air. All Natureline products can be used safely in areas where allergy sufferers, people with health problems, small children and animals are present.




**SENTINEL HAUS  
INSTITUT**

The Sentinel Haus Institute (SHI) describes itself as a knowledge and market leader on the subject of healthy living and has set itself the goal of making healthier buildings the norm. On its website [www.sentinel-haus.de](http://www.sentinel-haus.de) you will find information on emission-tested products, trained specialists, certified practical examples, and thematic worlds all about healthier building and renovation. Thanks to its many convincing features, our NATURELINE product line is listed on the portal.

JORDAN NATURE-PUR 200  
JORDAN NATURE FIRE-PROTECT 210  
JORDAN NATURE-COLOR 203  
JORDAN NATURE-PUR PLUS PRO 202

**64 – 67**



Our wood preservatives for outdoor use provide optimum protection for your wooden surfaces in all weathers. We pay attention not only to wood protection but also to the environment. All our products for outdoor use are therefore free of toxins and other harmful ingredients. With us, you can protect your surfaces sustainably - environmentally and health-friendly for humans and animals.

Certified by the eco-Institute and recommended by the Sentinel Haus Institute. It doesn't get any greener than this!

**IN ALL WEATHERS**  
PRODUCTS FOR OUTDOOR USE



## JORDAN NATURE-PUR 200

**Biocide-free wood preservative for indoor and outdoor use**

DELIVERY BATCHES  
1, 5 and 25 kg

ADDITIONALS  
Cleaning: Water

### PRODUCT PROPERTIES

- + purely mineral, solvent- and emission-free<sup>1</sup>
- + without pesticides, insecticides and biocides<sup>1</sup>
- + free of extractable heavy metals (acc. EN 71, part 3)
- + leaves no harmful substances in nature<sup>1</sup>
- + impregnated wood can have contact with the ground without concern
- + vegan
- + suitable for bats, approved for roosts of endangered species<sup>2</sup>
- + harmless for bees, after drying, insects are not harmed by contact with the treated wood<sup>1</sup>
- + climate resistant, protects against harmful environmental influences including weathering<sup>3</sup>
- + eliminates the breeding ground of wood-destroying fungi and mould (acc. EN 113)<sup>4</sup>
- + protects against animal wood pests such as termites, house longhorn beetles, powderpost beetles, furniture beetles, woodworm, etc.<sup>5</sup>
- + prevents the spread of wood pests after infestation<sup>5</sup>
- + act as a flame-retardant, the spread of fire and the development of smoke are permanently inhibited<sup>6</sup>


### LISTED AT:

- + Sentinel Haus Institute – the institute for healthy buildings
- + European Society for Healthy Building and Indoor Hygiene (EGGBI)
- + Swiss Coordination Office for Bat Protection

### SCOPE OF APPLICATION



### TYPE OF APPLICATION



## JORDAN NATURE-COLOR 203

**Biocide-free, coloured wood preservative for indoor and outdoor use**

DELIVERY BATCHES  
1, 5 and 25 kg

ADDITIONALS  
Cleaning: Water


### ADDITIONAL PRODUCT PROPERTIES

- + colours based on mineral pigments
- + used for individual colour design
- + card shades can be mixed with each other
- + non-washable and colourfast
- + colours are free from extractable heavy metals (acc. EN 71, part 3)

### SCOPE OF APPLICATION



### TYPE OF APPLICATION



Also available as a starter set.



## JORDAN NATURE FIRE-PROTECT 210

**NEW!**

**Flame-retardant, biocide-free wood preservative**

DELIVERY BATCHES  
1, 5 and 25 kg

ADDITIONALS  
Cleaning: Water


### ADDITIONAL PRODUCT PROPERTIES

- + purely mineral, solvent- and biocide-free flame retardant without harmful substances
- + low flammability and low smoke emission
- + increases the fire resistance of untreated wooden components
- + achieves fire protection class EN 13501-1 C-s1, d0 (flame retardant) in application with CLT cross laminated timber made of spruce<sup>7</sup>

### SCOPE OF APPLICATION



### TYPE OF APPLICATION



## JORDAN NATURE-PUR PLUS PRO 202

**Transparent base material for JORDAN NATURE-COLOR**

DELIVERY BATCHES  
1, 5 and 25 kg

ADDITIONALS  
Cleaning: Water

### ADDITIONAL PRODUCT PROPERTIES

- + additive to dye or lessen the JORDAN NATURE-COLOR 203 card shades
- + EN 71, part 3, free of extractable heavy metals

### TESTED BY:

1. ECO Institute (certification no. ID 1016-33690-002)
2. Swiss Coordination Office for Bat Protection
3. EPH, Entwicklungs- und Prüflabor Holztechnologie GmbH (Nr. 2715644)
4. Department for Forest Products, Faculty of Forest Sciences of the Swedish University of Agricultural Sciences (Nr. Nr. 2011-113/84)
5. Forest Products Department, Mississippi State University
6. SP Technical Research Institute of Sweden
7. MPA Dresden GmbH







Whether by hand or machine: With our cleaning and care products, you can maintain surfaces and ensure a long-lasting value preservation of furniture and floors.

**WELL CARED AND  
BEAUTIFUL IN AN INSTANT**  
CARE AND CLEANING PRODUCTS

JORA-CLEAN BASIC CLEANER JCG 920  
JORA-CARE MAINTENANCE AGENT JCW 930  
JORA-CARE WAX POLISH JCW 940  
JORA-CARE MAINTENANCE OIL JCP 950  
JORA-CARE MAINTENANCE OIL JCP 955  
  
JORA-CLEAN PLASTIC CLEANER JCK 960

**68 – 71**





## JORA-CLEAN BASIC CLEANER JCG 920

### PRODUCT PROPERTIES

- + cleaning agent for very dirty surfaces (such as floors)
- + suitable for removing old layers of water-based care products
- + suitable for removing stubborn dirt on sealed parquet

Highly effective cleaning agent for surfaces that are very susceptible to soiling

DELIVERY BATCHES  
200 ml and 1 litre



## JORA-CARE MAINTENANCE AGENT JCW 930

### PRODUCT PROPERTIES

- + based on natural jojoba oil
- + suitable for regular maintenance care of oiled surfaces
- + especially suitable for the care of furniture and lightly stressed parquet floors
- + cleans with the power of oranges

Natural care product suitable for regular application

DELIVERY BATCHES  
200 ml and 1 litre



## JORA-CARE WAX POLISH JCW 940

### PRODUCT PROPERTIES

- + easy to use
- + liquid wax mixture
- + highly economical, 1 litre is sufficient for approx. 200m<sup>2</sup>
- + suitable for the care of sealed parquet floors
- + especially suitable for the initial care of parquet floors
- + ensures efficient edge protection
- + ensures a thin protective film on the surface

Wax polish with protecting properties for sealed surfaces

DELIVERY BATCHES  
200 ml and 1 litre



## JORA-CARE MAINTENANCE OIL JCP 950

### PRODUCT PROPERTIES

- + suitable for the initial and maintenance care of oiled surfaces
- + short drying time
- + suitable for regular freshening up of oiled surfaces

Versatile care oil with short drying time for oiled surfaces

DELIVERY BATCHES  
200 ml and 1 litre



## JORA-CARE MAINTENANCE OIL JCP 955

### PRODUCT PROPERTIES

- + suitable for the initial and maintenance care of oiled surfaces
- + short drying time
- + contains natural carnauba wax
- + free of VOC and cobalt-free
- + suitable for regular freshening up of oiled surfaces

Versatile, water-based care oil with short drying time for oiled surfaces

DELIVERY BATCHES  
200 ml and 1 litre



## JORA-CLEAN PLASTIC CLEANER JCK 960

### PRODUCT PROPERTIES

- + for the efficient removal of adhesive residues, glue residues, traces of adhesive tape as well as ballpoint pen, pencil and felt-tipped pen lines
- + also suitable for detaching old stickers
- + can be used for nearly all plastic surfaces such as ABS, melamine, PE, PP or PVC
- + suitable for degreasing of surfaces
- + gentle, streak free cleaning

Plastic cleaner for cleaning of plastic surfaces and edges

DELIVERY BATCHES  
200 ml, 1, 2,5 and 25 litre

## ADDITIVE TO INCREASE THE SLIP RESISTANCE

- AQUA PRO-GRIP APG 402

## THINNER AND MACHINE CLEANING

- SPECIAL THINNER V 1313
- NITRO-THINNER V 1415
- DD-THINNER V 2244
- THINNER HG V 2083
- DECO-OIL-THINNER V 608

## RETARDER

- RETARDER V19

## MACHINE CLEANING

- UNI-WASHING SOLVENT V 803
- AQUA-CLEAN AC 460

## COLOUR CONCENTRATES

- PIGMENT CONCENTRATE Y
- CLASSIC-COLOR-CONCENTRATE CCC 1000 - 1009

## ADDITIVE TO INCREASE THE METAL MARKING RESISTANCE

- CLASSIC-RINGFESTKONZENTRAT CR 802

## ADDITIVE TO INCREASE THE LIGHT RESISTANCE

- LICHTSCHUTZKONZENTRAT LK 45

## EFFECT PASTES

- ANTIQUE PASTE P 57-0 white
- ANTIQUE PASTE P 57-1 yellow
- ANTIQUE PASTE P 57-3 red
- ANTIQUE PASTE P 57-5 blue
- ANTIQUE PASTE P 57-6 green
- ANTIQUE PASTE P 57-9 black
- LIME-OAK PASTE P 1669
- DECOMATTPASTE DM 621
- DECOMATTPASTE DM 622
- DECOSTRUCTURE DS 604 (grob)
- DECOSTRUCTURE DS 605 (fein)



Our wide range of additional products offers further possibilities for surface coating with effect pastes, colour concentrates and additives.

**THIS AND THAT**  
PROFESSIONAL ADDITIVES  
FOR PERFECT SURFACES

ADDITIVE TO INCREASE THE SLIP RESISTANCE  
THINNER AND MACHINE CLEANING  
RETARDER  
MACHINE CLEANING  
COLOUR CONCENTRATES  
ADDITIVE TO INCREASE THE METAL MARKING RESISTANCE  
ADDITIVE TO INCREASE THE LIGHT RESISTANCE  
EFFECT PASTES

**72–73**

	SCOPE OF APPLICATION	PRODUCT	1C/2C	PRODUCT LINE	TYPE OF APPLICATION	BENEFITS	GLOSS LEVEL	HARDENER	DIN 4102-B1 low flammability or similar	EN 71, part 3 free of extractable heavy metals	DIN 53160 resistance to saliva and perspiration	DIN 68861-1B chemical resistance	Others	Page
FILLER		AQUA-FILLER AF 430	1C+2C	AQUALINE		excellent filling power and excellent firmness on vertical surfaces		10:1 by volume with AQUAHARDENER AH 412	under examination	yes				10, 48, 56
		PUR-FILLER F 1338	2C	CLASSICLINE		pigmented filler with good sealing effect		10:1 by volume with hardener H 132	yes	yes				13, 30
		ECO-JOINT-FILL EF 510	1C	PARQUETLINE		quick filling of joints and cracks in wooden floors							GISCODE: W2+	40
PRIMER / BASE COATS		CLASSICBASE CBM 820	1C	CLASSICLINE		excellent adhesion properties on various metals								15
		CLASSICBASE CB 823	1C	CLASSICLINE		excellent adhesion properties on glass								15
		JOCOPHEN-BASE COAT H 2010	2C	CLASSICLINE		very good sealing effect, even with ingredient-rich woods	glossy	2:1 by volume with hardener H 2242		yes				14, 31
		HIGH-SOLID-BASE COAT H 4500	2C	CLASSICLINE		high solid content, ideal as a base coat for buffable high gloss surfaces	glossy	2:1 by volume with hardener H 4002	yes					14
		ACRYPUR-BASE COAT H 23100	2C	CLASSICLINE		transparent base coat with very high filling power	glossy	10:1 by volume with hardener H 132		yes				13, 30
		ECO-BASE EB 500	1C	PARQUETLINE		low odour and free of harmful substances, reduces the risk of joint adhesion				yes			DIBt-approval GISCODE: W2+	40
		AQUA MAGIC-COLOR AMC 462	1C+2C	AQUALINE		light-stable and environmentally friendly colour lacquer system	matt	10:1 by volume with AQUAHARDENER AH 412	under examination	yes	under examination			10, 48, 56
COLOURED LACQUERS		JORA-COLOR JC 150	2C	CLASSICLINE		lightfast colour lacquer system, suitable for the coating of children's toys	matt	10:1 by volume with hardener H 132	yes	yes	yes	1B	Suitability for children's toys	17
		HIGH-SOLID-COLOR H 600X	2C	CLASSICLINE		extremely fast drying, makes it possible to save costs and time	matt (H 6000) special matt (H 6007)	2:1 by volume with hardener H 6002		yes	yes	1B		16, 31
		JORA-BRILLANT-COLOR JBC 855	2C	CLASSICLINE		brilliant, high-gloss surfaces with very high mechanical resistance	high gloss	2:1 by volume with hardener H 872 2:1 by volume with hardener H 874 Turbo	yes	yes	yes	1B		16
		COLORLUX-METALLIC H 378	2C	CLASSICLINE		metallic lacquer system for special adjustments	matt	10:1 by volume with hardener H 132		yes	yes	1B		17, 32
		JORDAN NATURE-COLOR 203	1C	NATURELINE		environmentally friendly, biocide- and pesticide-free colour system	matt			yes				67
		PUR-SCHICHTER H 136X	2C	CLASSICLINE		multi-layer lacquer with very high mechanical resistance	semi-matt (H 1363) matt (H 1365) deep matt (H 1366) special matt (H 1367)	10:1 by volume with hardener H 1362		yes	yes	1B		19, 32
MULTI-LAYER LACQUERS		TEMPOFIX-SCHICHTER SG 17-X	1C	CLASSICLINE		fast-drying multi-layer lacquer, very easy processing	semi-matt (SG 17-3G) matt (SG 17-5G) deep matt (SG 17-6G)			yes	yes			18
		HIGH-SOLID-SCHICHTER H 400X	2C	CLASSICLINE		high solid lacquer, very high filling power and fast drying	glossy (H 4001) semi-matt (H 4004) matt (H 4005) special matt (H 4007)	2:1 by volume with hardener H 4002		yes	yes	1B		19
		COSMOLIT-SCHICHTER HS 200X	1C	CLASSICLINE		easy handling, particularly high mechanical resistance	semi-matt (HS 2003) matt (HS 2005) deep matt (HS 2006)			yes	yes	1B		18



SCOPE OF APPLICATION	PRODUCT	1C/2C	PRODUCT LINE	TYPE OF APPLICATION	BENEFITS	GLOSS LEVEL	HARDENER	DIN 4102-B1 low flammability or similar	EN 71, part 3 free of extractable heavy metals	DIN 53160 resistance to saliva and perspiration	DIN 68861-1B chemical resistance	Others	Page
	AQUA-CLEAR AC 475	1C+2C	AQUALINE		water-based clear lacquer with high scratch and abrasion resistance	deep matt (- 10) matt (- 20) semi-matt (- 30)	10:1 by volume with AQUAHARDENER AH 412	under examination	yes	under examination			11, 49, 57
	AQUA-CLEAR LOW AC 477	1C+2C	AQUALINE		elegant appearance for porous woods	deep matt (- 10) matt (- 20) semi-matt (- 30)	10:1 by volume with AQUAHARDENER AH 412	under examination	yes	under examination			12, 50, 58
	AQUASTEP AS 490	1C+2C	AQUALINE		very high light stability and high mechanical resistance	matt (-5) semi-matt (-3)	10:1 by volume with AQUAHARDENER AH 410		yes	yes	1B		12, 42, 50, 58
	AQUA-NATUREFFEKT AN 420	2C	AQUALINE		natural raw wood-like surface with good resistance	natural matt	10:1 by volume with AQUAHARDENER AH 410		yes	yes	1B		11, 49, 57
	AQUA SUN-PROTECT SP 480	1C	AQUALINE		excellent light stability for protection against yellowing	natural matt							59
	JORA-BRILLANT JB 875	2C	CLASSICLINE		brilliant, high-gloss surfaces with very high mechanical resistance	high gloss	2:1 by volume with hardener H 872 2:1 by volume with hardener H 874 Turbo	yes	yes	yes	1B		22, 35
	JORA ULTRA-MATT RESIST	2C	CLASSICLINE		ultra matt surface with extremely high gloss stability, anti-fingerprint effect	natural matt	100:15 by volume with hardener H 132		yes		1B		21, 34
	CLASSIC-EXTREME-RESIST CE 894-X	2C	CLASSICLINE		extremely high mechanical and chemical resistance, anti-fingerprint effect	matt (CE 894-5) deep matt (CE 894-6)	10:1 by volume with hardener H 132		yes	yes	1B		20, 34
	GIESS-COLORLUX H 37X	2C	CLASSICLINE		lightfast topcoat for curtain coating and spraying	glossy (H 371) semi-matt (H 373) matt (H 375) deep matt (H 376) super matt (H 376-S2) special matt (H 377)	10:1 by volume with hardener H 132	yes	yes	yes	1B		21, 33
	JOCOPHEN-DD-LACQUER H 224X	2C	CLASSICLINE		high filling power and fast drying	semi-matt (H 2243) matt (H 2245) deep matt (H 2246)	2:1 by volume with hardener H 2242		yes	yes	1B		20, 33
	JOCOPAN-ROHHOLZEFFEKTACK H 1861	2C	CLASSICLINE		fast drying, resistant natural effect lacquer	natural matt	2:1 by volume with hardener H 1862		yes	yes	1B		22
	JORDAN NATURE FIRE-PROTECT 210	1C	NATURELINE		increases the flame retardant properties of wood substrates	matt		yes, DIN EN 13501-1 C-s1-d0	yes				66
	JORDAN NATURE-PUR 200		NATURELINE		environmentally friendly, biocide- and pesticide-free wood preservative	matt			yes				66
	1K ECO-FINISH EF 55X	1C	PARQUETLINE		resistant parquet lacquer for public and private areas	semi-matt (EF 553) matt (EF 555)			yes			DIBt-approval GISCODE: W2+	41
	DECO-OIL-COLOR DO 630	1C	DECOLINE		coloured oil in 11 basic shades, all shades can be mixed with each other	matt					1C	complies GISCODE: Ö60, cobalt-free	23, 42, 51, 60
	DECO-OIL DO 640C	1C	DECOLINE		water and dirt repellent properties	matt			yes		1C	complies GISCODE: Ö60, cobalt-free	23, 35, 43, 51, 60
	DECO-OIL DO 660	1C+2C	DECOLINE		very easy processing	matt	10:1 by volume with DECO-OILHARDENER DH 613		yes		1C	complies GISCODE: Ö10, Ö-Norm C 2380:2021, cobalt-free	24, 36, 43, 52, 61

	SCOPE OF APPLICATION	PRODUCT	1K/2K	PRODUCT LINE	TYPE OF APPLICATION	BENEFITS	GLOSS LEVEL	HARDENER	DIN 4102-B1 low flammability or similar	EN 71, part 3 free of extractable heavy metals	DIN 53160 resistance to saliva and perspiration	DIN 68861-1B chemical resistance	Others	Page
WAXES AND OILS		DECO-OBJECT-OIL DO 670	1K	DECOLINE		excellent water resistance	matt			yes		1C	complies GISCODE: Ö 60, cobalt-free	24, 36, 44, 52, 61
		DECO-NATURWACHS-OIL DO 680	1K	DECOLINE		good penetration behaviour	semi-matt to matt			yes		1C	complies GISCODE: Ö 60, cobalt-free	25, 37, 44, 53, 62
		ECO-HARTWACHS-FINISH EHF 570	1K	PARQUETLINE		extremely good penetration behaviour and easy processing	matt			yes		1C	complies GISCODE: Ö 60, cobalt-free	25, 41
STAINS		HYDROSTAIN MODULAR JC63X0-XXXX	1K	STAINLINE		modular stain system for a wide range of applications								26, 45, 53, 63
		AQUASTAIN-COLOR ASC 531-533	1K	STAINLINE		lightfast, intense colours, excellent in combination with UV and water-based lacquers								26, 45
		CLASSICSTAIN CS 731-833	1K	STAINLINE		mixable basic shades for a wide range of design possibilities								27, 37
CARE AND CLEANING		JORA-CLEAN BASIC CLEANER JCG 920		CARELINE		highly effective cleaning agent for heavily soiled surfaces								70
		JORA-CARE MAINTENANCE AGENT JCW 930		CARELINE		natural cleaning and care product								70
		JORA-CARE WAX POLISH JCW 940		CARELINE		easy to handle polish with protective effect								70
		JORA-CARE MAINTENANCE OIL JCP 950		CARELINE		fast drying care for oiled surfaces								71
		JORA-CARE MAINTENANCE OIL JCP 955		CARELINE		natural, water-based maintenance oil, VOC-free								71
		JORA-CLEAN PLASTIC CLEANER JCK 960		CARELINE		effective cleaner for plastic surfaces								71



TYPE OF APPLICATION		SCOPE OF APPLICATION	
	Spray gun		Outdoors
	Dipping		Indoors/Outdoors
	Spatula		Interior Fittings
	Roller		Stairs
	Curtain coating		Furniture
	Roller coating		Parquet
	Vacuum coating		Kitchen
	Brushing		Baths
	Wiping		Doors
			Metal
			Glass

LEGEND OF PICTOGRAMS



**PLANTAG Coatings GmbH**

Plantagenweg 34–38

32758 Detmold

GERMANY

Fon +49 5231 6002 661

Fax +49 5231 6002 9661

E-Mail [info@jordanlacke.de](mailto:info@jordanlacke.de)

**JORDAN Lacke – a brand of PLANTAG Coatings GmbH**

